555-7101-119

CallPilot

201i Server Maintenance and Diagnostics

Product release 3.0 Standard 1.0 November 2004

NORTEL NETWORKS™

CallPilot
201i Server Maintenance and Diagnostics

Publication number:	555-7101-119
Product release:	3.0
Document release:	Standard 1.0
Date:	November 2004

Copyright © 2004 Nortel Networks, All Rights Reserved

Printed in Canada

Information is subject to change without notice. Nortel Networks reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant.

The process of transmitting data and call messaging between the CallPilot server and the switch or system is proprietary to Nortel Networks. Any other use of the data and the transmission process is a violation of the user license unless specifically authorized in writing by Nortel Networks prior to such use. Violations of the license by alternative usage of any portion of this process or the related hardware constitutes grounds for an immediate termination of the license and Nortel Networks reserves the right to seek all allowable remedies for such breach.

This page and the following page are considered the title page, and contain Nortel Networks and third-party trademarks.

Nortel Networks, the Nortel Networks logo, the Globemark, and Unified Networks, BNR, CallPilot, DMS, DMS-100, DMS-250, DMS-MTX, DMS-SCP, DPN, Dualmode, Helmsman, IVR, MAP, Meridian, Meridian 1, Meridian Link, Meridian Mail, Norstar, SL-1, SL-100, Succession, Supernode, Symposium, Telesis, and Unity are trademarks of Nortel Networks.

3COM is a trademark of 3Com Corporation.

ADOBE is a trademark of Adobe Systems Incorporated.

ATLAS is a trademark of Quantum Corporation.

BLACKBERRY is a trademark of Research in Motion Limited.

CRYSTAL REPORTS is a trademark of Seagate Software Inc.

EUDORA and QUALCOMM are trademarks of Qualcomm, Inc.

ETRUST and INOCULATEIT are trademarks of Computer Associates Think Inc.

DIRECTX, EXCHANGE.NET, FRONTPAGE, INTERNET EXPLORER, LINKEXCHANGE, MICROSOFT, MICROSOFT EXCHANGE SERVER, MS-DOS, NETMEETING, OUTLOOK, POWERPOINT, VISUAL STUDIO, WINDOWS, WINDOWS MEDIA, WINDOWS NT, and WINDOWS SERVER are trademarks of Microsoft Corporation.

GROUPWISE and NOVELL are trademarks of Novell Inc.

INTEL is a trademark of Intel Corporation.

LOGITECH is a trademark of Logitech, Inc.

MCAFEE and NETSHIELD are trademarks of McAfee Associates, Inc.

MYLEX is a trademark of Mylex Corporation.

NETSCAPE COMMUNICATOR is a trademark of Netscape Communications Corporation.

NOTES is a trademark of Lotus Development Corporation.

NORTON ANTIVIRUS and PCANYWHERE are trademarks of Symantec Corporation.

QUICKTIME is a trademark of Apple Computer, Inc.

RADISYS is a trademark of Radisys Corporation.

ROLM is a trademark of Siemens ROLM Communications Inc.

SLR4, SLR5, and TANDBERG are trademarks of Tandberg Data ASA.

SONY is a trademark of Sony Corporation.

SYBASE is a trademark of Sybase, Inc.

TEAC is a trademark of TEAC Corporation.

US ROBOTICS, the US ROBOTICS logo, and SPORTSTER are trademarks of US Robotics.

WINZIP is a trademark of Nico Mark Computing, Inc.

XEON is a trademark of Intel, Inc.

Publication history

November 2004	CallPilot 3.0, Standard 1.0; *CallPilot Installation and Configuration, 201i Server Maintenance and Diagnostics*; title of book changed; revisions for change of operating system from Windows NT to Windows 2003.
September 2002	Standard 1.0 of *CallPilot Installation and Configuration, Part 5: 201i Server Maintenance and Diagnostics* is released for CallPilot 2.0 general availability.

Contents

1 About this guide 9

Maintenance and diagnostics overview 10
Resolving system problems 13
Replacing hardware components 15

2 Troubleshooting your CallPilot system 17

Overview. 18

Section A: LED and HEX displays 19

Status LEDs and HEX display location 20
Interpreting the power status LED 21
Interpreting the MPC slot LEDs 23
Interpreting the network and drive activity LEDs 24
Interpreting the HEX display 26

Section B: Startup diagnostics 31

Startup diagnostic codes 32
Startup sequence description 36
Troubleshooting startup problems 39

3 Using the operating system online diagnostic tools 41

Overview. 42
Viewing event logs 44
Using TCP/IP diagnostic tools 49

4 Using CallPilot Manager to monitor hardware 59

Understanding fault management 60

Section A: Tools for isolating and fixing hardware problems 61

Overview 62
Alarm Monitor 64
Event Browser 67
Maintenance page 70
Channel and Multimedia Monitors 71

Section B: Working with the Maintenance page 73

Introducing the Maintenance page 74
Viewing component states 78
Starting and stopping components 81
Running integrated diagnostics 85
Viewing the last diagnostic results 90

Section C: Working with the Multimedia and Channel Monitors 93

Working with the Multimedia Monitor 94
Working with the Channel Monitor 96

5 Using CallPilot system utilities 99

Overview 100
Diagnostics Tool 101
PEP Maintenance utility 104
System Monitor 106

6 Performing hardware maintenance and mechanical assembly 113

Overview 114
Removing the server from the switch 115
Replacing the server 117
Replacing the IDE hard drive 122
Replacing the software feature key 129
Replacing Multimedia Processing Cards 131

Index 137

Chapter 1

About this guide

In this chapter

Maintenance and diagnostics overview 10

Resolving system problems 13

Replacing hardware components 15

Maintenance and diagnostics overview

Introduction

The maintenance and diagnostic activities discussed in this guide are divided into two groups of activities:

- troubleshooting and diagnostics (identifying the cause of and resolving system problems)
- performing hardware maintenance

For a list of CallPilot documentation, see the document map on page 12.

Who should read this guide

This guide is for administrators, technicians, and engineers responsible for maintaining a CallPilot server. It is intended to act as a guide for

- using system tools to identify the cause of system problems
- installing, replacing, or upgrading hardware components

This guide assumes that you have basic computing skills, and are familiar with necessary safety procedures. For more information about safety, refer to *CallPilot Fundamentals*.

Resolving system problems

This guide describes how to use a variety of CallPilot resources for resolving system problems.

If you are not able to resolve your problem with the resources described in this guide, you can also refer to the following documents:

- *CallPilot Administrator's Guide* (NTP 555-7101-301)

- *CallPilot Troubleshooting Guide*

Note: For more details, see “Resolving system problems” on page 13.

Preparing for hardware or software maintenance

The “Starting up and shutting down the CallPilot server” chapter in the *CallPilot Installation and Configuration Task List* explains how to restart, shut down, and power up the CallPilot server. You may be asked to perform one or more of these tasks while maintaining your server.

Performing hardware maintenance

Chapter 6, “Performing hardware maintenance and mechanical assembly,” explains how to replace hardware components. For more details, see “Replacing hardware components” on page 15.

Rebuilding the CallPilot system

When you purchased your CallPilot server, it came preinstalled with the operating system and CallPilot server software. If your CallPilot server no longer functions because of a software problem, you may need to reinstall the CallPilot software or rebuild the system.

To locate instructions for these tasks, refer to the *CallPilot Software Administration and Maintenance Guide*.

NORTEL NETWORKS

CallPilot Customer Documentation Map

NTP Number 555-7101-(nnn)

- **Fundamentals**
  - CallPilot Fundamentals (-010)
- **Planning and Engineering**
  - Planning and Engineering Guide (-101)
  - Network Planning Guide (-102)
  - Data Networking for Voice over IP (553-3001-160)
- **Installation and Configuration**
  - Installation and Configuration Task List (-210)
  - **Server Installation Guides**
    - 201i Server Hardware Installation (-220)
    - 703t Server Hardware Installation (-226)
    - 1002rp Server Hardware Installation (-205)
  - **Configuration and Testing Guides**
    - Meridian 1 and CallPilot Server Configuration (-222)
    - Succession 1000 System and CallPilot Server Configuration (-510)
  - **Unified Messaging Software Installation**
    - Desktop Messaging and MyCallPilot Installation Guide (-505)
- **Administration**
  - Administrator's Guide (-301)
  - Software Administration and Maintenance Guide (-202)
  - Desktop Messaging and MyCallPilot Administration Guide (-503)
  - Meridian Mail to CallPilot Migration Guide (-801)
  - Application Builder Guide (-325)
  - Reporter Guide (-310)
- **Maintenance**
  - Troubleshooting Guide (-501)
  - **Server Maintenance and Diagnostics**
    - 201i Server Maintenance and Diagnostics (-119)
    - 703t Server Maintenance and Diagnostics (-227)
    - 1002rp Server Maintenance and Diagnostics (-206)
- **End User Information**

End User Cards	End User Guides
Unified Messaging Quick Reference Card	Multimedia Messaging User Guide
Unified Messaging Wallet Card	Speech Activated Messaging User Guide
Command Comparison Card A-Style	Desktop Messaging User Guide for Microsoft Outlook
Command Comparison S-Style	Desktop Messaging User Guide for Lotus Notes
Menu Interface Quick Reference Card	Desktop Messaging User Guide for Novell Groupwise
Alternate Command Interface Quick Reference Card	Desktop Messaging User Guide for Internet Clients
	MyCallPilot User Guide

Resolving system problems

Introduction

Chapters 2 to 5 in this guide describe how to use a variety of CallPilot resources for resolving system problems.

If you are not able to resolve your problem with the resources described in this guide, you can also refer to the following documents:

- *CallPilot Administrator's Guide* (NTP 555-7101-301)
- *CallPilot Troubleshooting Guide*

Using this guide

This guide provides instructions for using the resources provided by your 201i server, as follows:

To	See
interpret the LEDs on the 201i server	Chapter 2, "Troubleshooting your CallPilot system"
interpret startup sequence and diagnostic codes	Chapter 2, "Troubleshooting your CallPilot system"
use the operating system diagnostic tools, including Event Viewer and TCP/IP diagnostic tools	Chapter 3, "Using the operating system online diagnostic tools"
use the Event Browser, Alarm Monitor, and Maintenance page in CallPilot Manager	Chapter 4, "Using CallPilot Manager to monitor hardware"

To	See
use the following CallPilot system utilities: ■ Diagnostics Tool ■ System Monitor	Chapter 5, "Using CallPilot system utilities"

Using the *CallPilot Administrator's Guide*

The *CallPilot Administrator's Guide* (NTP 555-7101-301) provides valuable information for monitoring system performance. The *CallPilot Administrator's Guide* describes how to

- view and filter server events
- monitor the CallPilot server performance, disk space, and database
- monitor and manage CallPilot channels
- troubleshoot CallPilot call service and system operation problems

Using the *CallPilot Troubleshooting Guide*

The *CallPilot Troubleshooting Guide* describes symptoms that can appear on all CallPilot server platforms, and ways to resolve them.

Use the *CallPilot Troubleshooting Guide* to resolve the following types of problems:

- server boot cycle failures
- peripheral device problems
- monitor display problems
- server to network connection problems
- remote access connection problems
- CallPilot application problems

Replacing hardware components

Introduction

This guide describes how to replace or install hardware components as follows:

To replace or install	See
the 201i server (in the event of a complete system failure)	"Replacing the server" on page 117
the hard drive	"Replacing the IDE hard drive" on page 122
the software feature key (dongle)	"Replacing the software feature key" on page 129
MPC-8 cards	"Replacing Multimedia Processing Cards" on page 131

Approved replacement parts

Before replacing any parts on your server, refer to the Nortel Networks product catalog for the part codes.



CAUTION

Risk of system damage

The use of parts that are not approved by Nortel Networks can cause serious system problems or void your Nortel Networks warranty.

Preparing for maintenance activities

Before you proceed with hardware maintenance activities, review the *CallPilot Installation and Configuration Task List* for the following information:

- required tools and equipment
- recommended safety precautions for electrostatic discharge, handling cards, and handling your server
- instructions for shutting down your 201i server or for taking it out of service

Chapter 2

Troubleshooting your CallPilot system

In this chapter

Overview 18

Section A: LED and HEX displays 19

Status LEDs and HEX display location 20

Interpreting the power status LED 21

Interpreting the MPC slot LEDs 23

Interpreting the network and drive activity LEDs 24

Interpreting the HEX display 26

Section B: Startup diagnostics 31

Startup diagnostic codes 32

Startup sequence description 36

Troubleshooting startup problems 39

Overview

Introduction

This guide provides instructions for using the resources provided by your 201i system. Use these resources to determine the cause of system problems, and then resolve them.

LEDs and HEX display on the 201i server's faceplate

The LEDs indicate when

- the 201i server, MPC-8 card, or SCSI drive are in use
- it is safe to remove the server from the switch, or the MPC-8 card from the server
- network activity is occurring

The HEX display displays messages that appear during startup or normal 201i server operation.

For more information, see "LED and HEX displays" on page 19.

Startup sequence and diagnostic codes

To help you determine if the 201i server started successfully (or if it failed), watch the startup sequence and the diagnostic codes that appear. The entire sequence occurs when you do one of the following:

- Lock 201i server against the switch backplane. When locked against the backplane, the 201i server begins receiving power.
- Restart the operating system.
- Press Reset on the 201i server's faceplate to perform a hardware restart.

For more information, see "Startup diagnostics" on page 31.


Section A: LED and HEX displays

In this section

Status LEDs and HEX display location 20
Interpreting the power status LED 21
Interpreting the MPC slot LEDs 23
Interpreting the network and drive activity LEDs 24
Interpreting the HEX display 26

Status LEDs and HEX display location

The following diagram shows the location of the status LEDs and HEX display on the 201i server's faceplate:

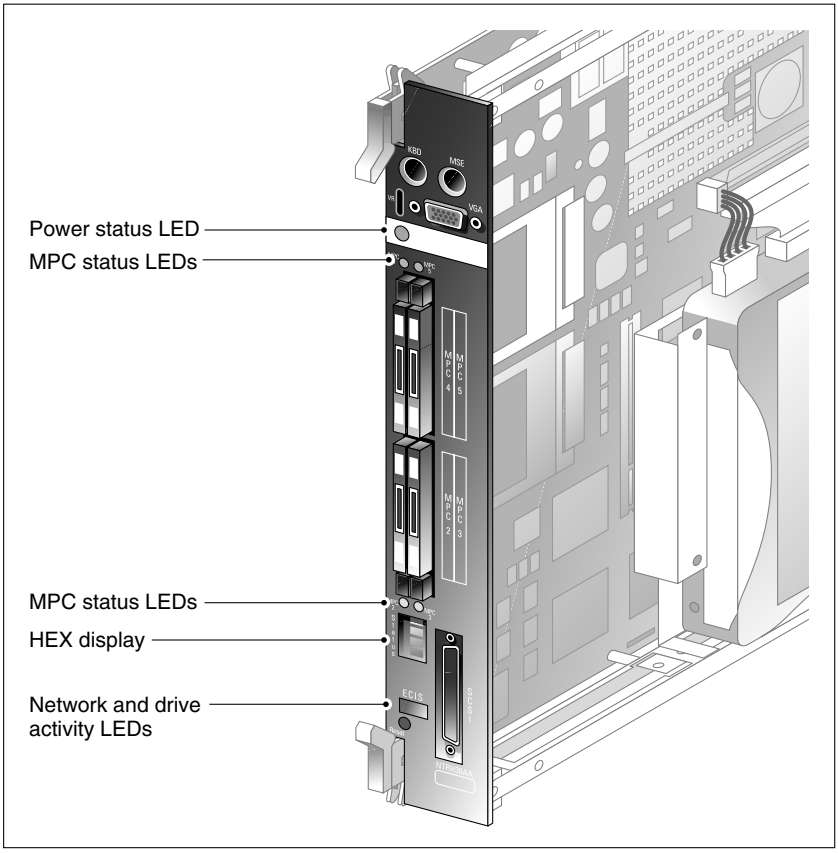

Interpreting the power status LED

Introduction

The power status LED is located on the 201i server's faceplate, directly under the keyboard connector. The LED indicates whether it is safe to remove the server from the switch (which results in a server power down).



CAUTION

Risk of equipment damage or data loss

Do not remove the 201i server during normal operation or certain phases of the startup sequence, as this can damage the operating system files on the hard disk.

To determine if it is safe to remove the 201i server from the switch, see "Power status LED indications" on page 22.

Power status LED functions

The LED indicates two server states:

- The 201i server is in use.
- It is safe to remove the 201i server from the switch.

Power status LED indications

IF the power status LED is	THEN
on	the server is powered on. *It is* safe to remove it from the switch. **Note:** When the LED is lit, the HEX display may display one of the following: T:XX, F:XX, HOST, or DOWN.
off	 **CAUTION** **Risk of equipment damage or data loss** *It is not safe* to remove the server from the switch. The server is in one of the following states: ■ The server is in the operating system startup sequence. ■ The server has completed the startup sequence and is running. **Note:** You must courtesy down CallPilot, and then shut down the operating system before you can remove the 201i server from the switch. For instructions, see "Powering down the server" in the *CallPilot Installation and Configuration Task List*.

Interpreting the MPC slot LEDs

Introduction

There is an LED for each MPC slot on the 201i server.

MPC slot LED functions

The LEDs indicate two possible MPC slot states:

- The MPC is in use.
- It is safe to remove the MPC from the server.

MPC slot LED indications

IF the MPC slot LED	THEN
is off	the MPC is not receiving power. It is safe to remove the MPC from the server.
is on	the MPC is in use. It is not safe to remove the MPC from the server.
was off, then came on	the MPC was recognized by the 201i software and subsequently powered up.
was on, then went off	the MPC was successfully disabled using the Maintenance page in CallPilot Manager. It is safe to remove the MPC from the server.

Interpreting the network and drive activity LEDs

Introduction

The 201i server provides four LEDs to indicate ELAN, CLAN, SCSI device, and IDE hard drive activity. They are labeled as follows:

LED label	Description
E	ELAN
C	CLAN
I	IDE hard drive
S	SCSI device (CD-ROM or tape drive)

Network LED states

IF the E or C LEDs are	THEN
off	a valid hardware connection with the network has not been established. Ensure that the cable is connected to the respective network hub. If the cable is connected, ensure that the cable is good.

IF the E or C LEDs are	THEN
on	a valid hardware connection with the network has been established. **Note:** Before the 201i server can receive or transmit data, you must configure valid IP settings on the 201i server by running the Configuration Wizard. For instructions, refer to the CallPilot Manager online Help.
blinking rapidly	activity is occurring on the network. **Note:** This does not mean that the 201i server is actually transmitting or receiving packets.

IDE drive LED states

IF the I LED is	THEN
off	the IDE hard drive is idle.
on	the IDE hard drive is being accessed.

SCSI device LED states

IF the S LED is	THEN
off	the SCSI device is idle, or the driver is not loaded.
blinking	the SCSI device is being accessed.
lit solid	the software driver has loaded but the SCSI device is not connected.

Interpreting the HEX display

Introduction

This section describes the codes that can appear on the HEX display during startup or normal 201i server operation.

Note: For a description of the codes that appear during startup diagnostics, see “Startup diagnostic codes” on page 32. For a description of the startup sequence, see “Startup sequence description” on page 36.

HEX display codes

During startup and normal 201i server operation, the HEX display on the server faceplate displays one of the following codes:

HEX display output	Description
Startup codes	
T:XX	The 8051 controller is starting and running diagnostics. These diagnostics are performed during a cold restart (when the server is powered up, or if you press Reset on the 201i server’s faceplate). For more details, see “Startup diagnostic codes” on page 32.
F:XX	At least one diagnostic failed. The displayed error code represents the first failed diagnostic. For more details, see “Startup diagnostic codes” on page 32.

HEX display output	Description
P:XX	An Extended POST error has occurred, where XX represents a two-character code. If the error is a critical error, the start cycle may halt. If the error is a non-critical error, the error code is logged in the operating system event log after the operating system startup completes and the CallPilot 8051 device driver starts. **ATTENTION** POST Terminal errors that result in a system halt do not appear on the HEX display. If you are not able to use the HEX display to determine the cause of a system halt, contact your Nortel Networks technical support representative.
HOST	This appears during the startup sequence and means that BIOS diagnostics have started. HOST also appears on the HEX display when the server has been started to ROM-DOS.
NT	The operating system start sequence has started.
OK	The operating system start sequence was successful.
CallPilot and 201i server operation codes	
BOOT	CallPilot is starting and is not yet fully operational.
PASS	CallPilot is fully operational and ready to accept calls.
WARN	CallPilot is ready to accept calls. However, some services failed the start sequence. Review the event log for further information.

HEX display output	Description
FAIL	CallPilot failed the start sequence and cannot accept calls. Review the event log for further information.
MIN	A minor alarm has occurred. Review the event log for further information.
MAJ	A major alarm has occurred. Review the event log for further information.
CRI	A critical alarm has occurred. Review the event log for further information.
???	An alarm of unknown severity occurred. This error should not occur on a properly installed system. The severity of this event is treated as higher-than-critical. **Note:** If you observe "???" or anything else on the display, contact your Nortel Networks technical support representative.

HEX display output	Description
DOWN	The operating system has been shut down. When the power status LED is on, it is safe to remove the 201i server from the switch. If you perform a cold restart by pressing Reset on the 201i server's faceplate, or by removing and then reinserting the 201i server in the switch, the start sequence starts at stage 1, described on page 36. If you perform a warm restart by selecting Restart on the operating system shutdown menu, the start sequence begins at stage 9, described on page 37. However, the HEX display behaves as follows: ■ The DOWN message remains displayed until the operating system start sequence begins. ■ The DOWN message does not scroll.

Section B: Startup diagnostics

In this section

Startup diagnostic codes 32
Startup sequence description 36
Troubleshooting startup problems 39

Startup diagnostic codes

Introduction

HEX display diagnostic codes are divided into the following two categories:

- critical startup diagnostics
- noncritical operating system and switch diagnostics

Critical startup diagnostic codes

All critical startup diagnostics must pass before the 201i can proceed with the start sequence. If a critical diagnostic fails, the start sequence indefinitely halts, an error code displays, and a continuous beep is heard.

The following table shows the critical startup diagnostic codes with their corresponding failure codes. Failure of these diagnostics means that there has been a server failure. The start cycle is halted.

Note: When a test is successfully completed, the next test code appears.

Test code	Test description	Failure code
T:01	Internal RAM self-test	F:01
T:02	ALU self-test	F:02
T:03	Address mode self-test	F:03
T:04	Boot ROM self-test	F:04
T:05	Timer self-test	F:05
T:06	Watchdog self-test	F:06
T:07	EEPROM self-test	F:07

Test code	Test description	Failure code
T:08	End of system controller self-tests The power status LED blinks three times.	not applicable
HOST	Start of BIOS diagnostics The monitor displays the BIOS start screen. If a critical error occurs, the start cycle is halted. Examples of critical errors are memory failure or another type of error resulting in no display on the monitor.	HOST continues to scroll across the HEX display

Noncritical operating system and switch diagnostic codes

If a noncritical operating and switch diagnostic test fails, the HEX display stops at the failed test. The remaining diagnostics are not performed. The start sequence continues, but server functionality can be compromised.

The following table shows the noncritical operating system and switch diagnostic codes with their corresponding failure codes.

Note: While the test is in progress, the following codes may appear for a short period. If these messages display temporarily (that is, no longer than one second), a problem does not exist.

Status code	Operation description	Failure code
HOST	Continuation of BIOS diagnostics The monitor displays the BIOS start screen. If a noncritical error occurs, the server continues the start sequence.	P:XX

Status code	Operation description	Failure code
NT	The operating system start sequence started **Note:** If the CallPilot server software is not installed, the HEX display remains at NT. (This can occur if you are performing a system rebuild.) During CallPilot software installation, the 8051 device driver is copied to the operating system, at which point the HEX display continues as described below.	P:XX **Note:** For a description, see “P:XX failure codes” on page 35.
CDLN	8051 device driver on the operating system has started; beginning of Cardlan interface communication (DS30x interface initialization) The system controller communicates with the switch, indicating that two cards are installed, and waits for switch acknowledgement.	CDLN Neither of the DS30x interfaces were initialized (both failed).
C:01	Initialization of the first DS30x interface	C:01 Initialization of the first DS30x interface failed. The second DS30x interface is OK.
C:02	Initialization of the second DS30x interface	C:02 Initialization of the second DS30x interface failed. The first DS30x interface is OK.

Status code	Operation description	Failure code
OK	Switch acknowledgement complete The operating system startup is complete, and CallPilot Fault Management takes over.	CRI, FAIL, MAJ, MIN, or WARN

P:XX failure codes

P:XX indicates a BIOS diagnostic error, where XX represents a two-character code. If the error is a critical error, the start cycle may halt. If the error is a noncritical error, the error code is reported in the operating system system event log after the operating system start sequence completes and the CallPilot 8051 device driver starts.

Note: If CallPilot is not installed, no event is logged.

ATTENTION

POST Terminal errors that result in a system halt do not appear on the HEX display. If you are not able to use the HEX display to determine the cause of a system halt, contact your Nortel Networks technical support representative.

Startup sequence description

Introduction

The following table describes the startup sequence and the diagnostic stages that occur. The entire sequence occurs when you do one of the following:

- You lock the 201i against the switch backplane and the 201i powers up.
- You press Reset on the 201i server's faceplate to perform a hardware restart.

Note: If you restart the operating system by clicking the Shut Down and Restart options, the start sequence starts at stage 9. However, the HEX display behaves as follows:

- The DOWN message remains displayed until the operating system start sequence begins.
- The DOWN message does not scroll.

Stage	Description	HEX display	Status LED
1	Internal RAM self-test This is the start of critical startup diagnostics for the 8051 system controller. If any of the tests fail, the startup cycle is halted. Approximate duration: less than 1 second	T:01	ON
2	ALU self-test Approximate duration: less than 1 second	T:02	ON
3	Address mode self-test Approximate duration: less than 1 second	T:03	ON

Stage	Description	HEX display	Status LED
4	Boot ROM self-test Approximate duration: less than 1 second	T:04	ON
5	Timer self-test Approximate duration: less than 1 second	T:05	ON
6	Watchdog self-test Approximate duration: less than 1 second	T:06	ON
7	EEPROM self-test This is a noncritical diagnostic. If it fails, this is a noncritical error, and the start cycle continues. Approximate duration: less than 1 second	T:07	ON
8	End of system controller self-tests. No errors were found. Approximate duration: less than 3 seconds	T:08	blinks three times
9	Beginning of BIOS diagnostics **Note:** The BIOS splash screen appears, and HOST scrolls across the HEX display. Approximate duration: 7 seconds	HOST	ON

Stage	Description	HEX display	Status LED
10	Beginning of the operating system start sequence The monitor displays the operating system logon prompt appears on the monitor. You are prompted for an operating system user name and password. If the system needs to be configured, a pop-up box for Maintenance Configuration Detection Information, may appear to remind you. If the Maintenance Configuration Detection Information box appears, click OK unless you want a reminder to configure the server.	NT	OFF
11	Completion of operating system start sequence. The 8051 system controller is running normally.	OK	OFF
12	The 201i CallPilot software loads. OK means that CallPilot has loaded. CallPilot Fault Management takes over. If FAIL, WARN, CRI, MAJ, or MIN appears instead of OK, a fault has occurred. Use the system and CallPilot Manager event logs and Alarm Monitor to determine what happened. Approximate duration: 5 minutes	One of the following, as applicable: ■ BOOT ■ PASS ■ FAIL ■ WARN ■ CRI ■ MAJ ■ MIN	OFF

Troubleshooting startup problems

Introduction

This section suggests tasks you can perform to determine why the 201i server fails the startup cycle.

To determine why the 201i server failed the 8051 startup

1. Make a note of any diagnostic codes.
2. Try restarting the server by pressing Reset on the 201i server's faceplate.
3. During the restart sequence, view the diagnostic codes on the HEX display for failures.

   For a description, see "Startup sequence description" on page 36.

   Note: Allow 5 minutes for the start cycle to complete.
4. Refer to the *CallPilot Troubleshooting Guide* for other suggestions.
5. If you still cannot find the cause of the failure, call your Nortel Networks technical support representative.

To determine why the 201i server failed to start CallPilot

1. Make a note of any diagnostic codes.
2. Try restarting the server by pressing Reset on the 201i server's faceplate.
3. During the start sequence, view the diagnostic codes on the HEX display for failures.

   For a description, see "Startup sequence description" on page 36.

   Note: Allow 5 minutes for the start cycle to complete.
4. View the event logs.

   For instructions, see "Viewing event logs" on page 44.
5. Refer to the *CallPilot Troubleshooting Guide* for other suggestions.
6. If you still cannot find the cause of the failure, call your Nortel Networks technical support representative.

Chapter 3

Using the operating system online diagnostic tools

In this chapter

Overview 42

Viewing event logs 44

Using TCP/IP diagnostic tools 49

Overview

Introduction

This section describes how to access the run-time online diagnostic tools provided by the operating system server software. Use these tools when a serious problem prevents the use of the CallPilot diagnostic tools that are available in CallPilot Manager.



CAUTION

Risk of software corruption

Do not run any utilities that are not documented in this guide.

Operating system Event Viewer

The operating system Event Viewer provides event logs to help you diagnose and debug system problems.

Operating system Diagnostics

The operating system Diagnostics window allows you to view details about the system and network components.

TCP/IP diagnostics

The following TCP/IP diagnostic tools are described in this chapter:

- ipconfig
- ping
- tracert
- arp

- nbtstat
- netstat

These utilities help you to verify network connectivity. They help you to thoroughly test the network interface and isolate any configuration problems. Network connectivity is essential to CallPilot operation.

Viewing event logs

Introduction

When the server startup cycle is complete, and if the CallPilot server has been configured (refer to the *CallPilot <switch model> and CallPilot Server Configuration* guide for your switch and server), the hex display should show PASS, and messages in dialog boxes on the monitor indicate that CallPilot is ready to accept calls.

If the hex display shows FAIL, CRI, MAJ, MIN, or FAIL or one or more error messages appear on the monitor, an event (such as a warning, error, or information display) has occurred. To determine what happened, you can use the following:

- operating system Event Viewer on the 201i server (see "To use the operating system Event Viewer" on page 46)
- CallPilot Event Browser or Alarm Monitor in CallPilot Manager

  For more information, do one of the following:

  - See "Alarm Monitor" on page 64.
  - Refer to the *CallPilot Administrator's Guide* (NTP 555-7101-301).

Note: The Event Browser and Alarm Monitor include online Help for events, which may help you to resolve the problem. If you cannot log on to the CallPilot system using a web browser due to server problems, then use the operating system Event Viewer.

Types of event logs

Three types of event logs are available from the operating system Event Viewer, as follows:

Log type	Description
System	Logs events by the operating system components, including Routing and Remote Access Server (RRAS) or other operating system services.
Security	Logs security events, such as logons, logoffs, illegal access, and so on. This option is available only to users with Administrative access.
Applications	Logs events by application, such as database file errors, and so on.


Where to get more information

For more information about using the operating system Event Viewer, click Help → Contents in the Event Viewer window. See also "To use the operating system Event Viewer" on page 46.

To use the operating system Event Viewer


1 Click Start → Programs → Administrative Tools → Event Viewer.

Result: The Event Viewer window appears.

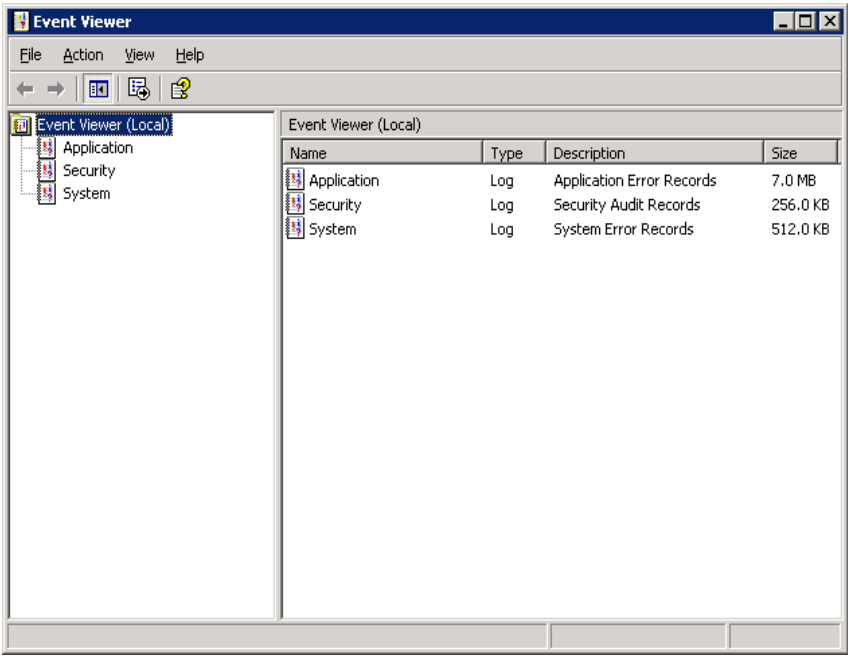


2 To view a log, click the name of the log in the left frame of the window.

The illustration shows an example of the Application log.

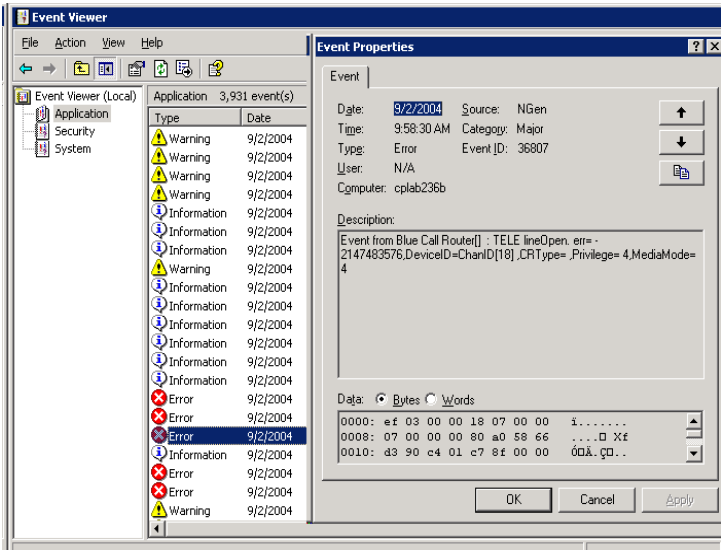

An example of a System log appears in the following illustration.

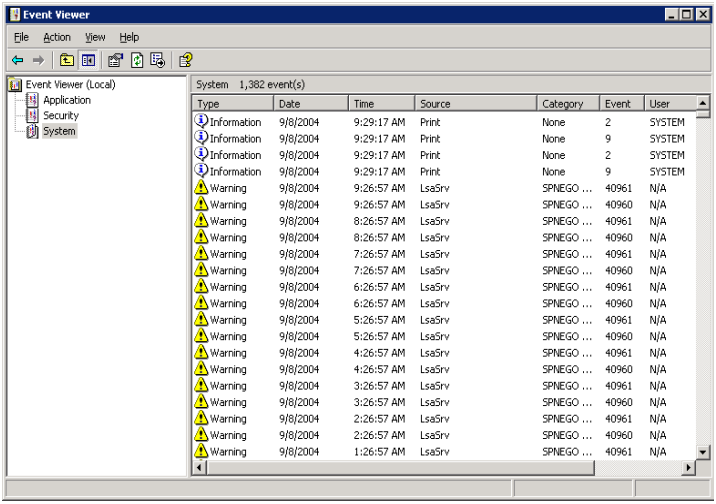

Note: The Security log available only to administrators is not shown.

3 Look for error codes flagged that have occurred since the last startup. Each error is date and time stamped.


major or critical errors


warnings


information

4 To determine the cause of the error, select and double-click the error.

Result: A description of the error appears in an Event Detail dialog box. An example of an error description is shown in the Event Detail dialog box in the Application log illustration on page 47.

5 Use the error description to help determine how to resolve errors.

Note: If the error persists or does not suggest a solution, contact your Nortel Networks support representative.

6 Click Close.

Result: The event log reappears.

7 Click Log → Exit.

Result: The Event Viewer closes.

Using TCP/IP diagnostic tools

Introduction

This section describes the following TCP/IP diagnostic tools available for the network adapter. These tools are useful for diagnosing LAN communication problems. The first three tools are the most useful:

- ipconfig (below)
- ping (page 51)
- tracert (page 52)
- arp (page 54)
- nbtstat (page 55)
- netstat (page 57)

These utilities help you to verify network connectivity. Network connectivity is essential to CallPilot operation. These utilities help you to thoroughly test the network interface and isolate any configuration problems.

The ipconfig command

The ipconfig command displays IP configuration information.

Ipconfig default

If you run the command without flags, it displays the IP address, subnet mask, and default gateway for each adapter bound to TCP/IP.

Ipconfig command syntax

```
ipconfig /[ ]
```

The following flags are available for the ipconfig command:

Flag	Description
/?	Displays Help information.
/all	Displays full configuration information.
/release	Releases the IP address for the specified adapter.
/renew	Renews the IP address for the specified adapter.

To run the ipconfig command from the operating system

1. Click Start → Programs → Accessories → Command Prompt to display the command prompt window.

   Result: The Command Prompt window appears.

2. At the prompt, type **ipconfig *<with appropriate parameters>***.

   Example: ipconfig /all

3. Press Enter.

   Result: The system runs the ipconfig utility.

4. Type **Exit** to exit the Command Prompt window.

The ping command

The ping command sends an echo request to a specified host. Use this command to verify network connectivity to the remote device.

Ping command syntax

The ping command uses the following syntax:

```
ping [-t] [-a] [-n count] [-l size] [-f] [-i TTL]
     [-v TOS] [-r count] [-s count]
     [[-j host-list] | [-k host-list]]
     [-w timeout] destination-list
```

Parameter	Description
-t	Pings the specified host until interrupted.
-a	Resolves addresses to host names.
-n count	Specifies the number of echo requests to send.
-l size	Sends buffer size.
-f	Set Don't Fragment flag in packet.
-i TTL	Time To Live
-v TOS	Type Of Service
-r count	Record route for count hops
-s count	Time stamp for count hops
-j host-list	Loose source route along host list
-k host-list	Strict source route along host list
-w timeout	Time-out in milliseconds to wait for each reply

To run the ping command from the operating system

1. Click Start → Programs → Accessories → Command Prompt to display the command prompt window.

   Result: The Command Prompt window appears.

2. At the prompt, type **ping *<destination IP address>*** (for example, ping 200.286.32.0), or **ping *<computer name>***.

3. Press Enter.

   Result: The system displays the ping results.

4. Type **Exit** to exit the Command Prompt window.

The tracert command

This utility determines the route taken to a destination.

How tracert works

The tracert utility follows several steps to complete its task:

- Tracert sends Internet Control Message Protocol (ICMP) echo packets with varying Time-To-Live (TTL) values to the destination.
- Each router along the path must decrement the TTL on a packet by at least 1 before forwarding it, so the TTL is effectively a hop count.
- When the TTL on a packet reaches 0, the router sends back an ICMP Time Exceeded message to the source system.
- Tracert determines the route by sending the first echo packet with a TTL of 1, and incrementing the TTL by 1 on each subsequent transmission until the target responds, or the maximum TTL is reached.
- Tracert then examines the ICMP Time Exceeded messages sent back by intermediate routers.

Tracert syntax

```
tracert [-d] [-h maximum_hops] [-j host_list]
        [-w timeout] [target_name]
```

Tracert parameters

The tracert command uses the following parameters:

Parameter	Description
-d	Specifies not to resolve addresses to hostnames.
-h maximum_hops	Specifies the maximum number of hops to search for the target.
-j host-list	Specifies a loose source route along the host list.
-w timeout	Waits the number of milliseconds specified by the time-out for each reply.
target_name	The name of the target host.

To run the tracert command from the operating system

1. Click Start → Programs → Accessories → Command Prompt to display the command prompt window.

   Result: The Command Prompt window appears.

2. At the prompt, type the following command:

   tracert *[-d] [-h maximum_hops] [j host_list] [-w timeout] [target name]*

   Example: tracert 200.286.0.32 210 200.236.0.04

3. Press Enter.

   Result: The system runs the tracert utility.

4. Type **Exit** to exit the Command Prompt window.

The arp command

The arp command displays and modifies the IP-to-physical address translation tables used by Address Resolution Protocol (arp).

Arp command syntax

The arp command uses the following syntax:

```
arp -s inet_addr eth_addr [if_addr]

arp -d inet_addr [if_addr]

arp -a [inet_addr] [-N if_addr]
```

Parameter	Description
-a	Displays current arp entries by interrogating the current protocol data. If inet_addr is specified, the IP and physical addresses for only the specified computer appear. If more than one network interface uses arp, entries for each arp table appear.
-g	Same as -a.
inet_addr	Specifies an Internet address.
if_addr	Specifies the Internet address of the interface whose address translation table should be modified. If not present, the first applicable interface is used.
eth_addr	Specifies a physical address.
-N if_addr	Displays the arp entries for the network interface specified by if_addr.
-d	Deletes the host specified by inet_addr.

Parameter	Description
-s	Adds the host and associates the Internet address inet_addr with the Physical address eth_addr. The physical address is given as six hexadecimal bytes separated by hyphens. The entry is permanent.

To run the arp command from the operating system

1. Click Start → Programs → Accessories → Command Prompt to display the command prompt window.

   Result: The Command Prompt window appears.

2. At the prompt, type **arp** with the required parameters (for example, arp -g 200.286.0.32).

3. Press Enter.

   Result: The system runs the arp command.

4. Type **Exit** to exit the Command Prompt window.

The nbtstat command

The nbtstat command displays protocol statistics and current TCP/IP connections using NBT.

Nbtstat command syntax

The nbtstat command uses the following syntax:

```
nbtstat [-a remotename] [-A IP address] [-c] [-n]
        [-R] [-r] [-S] [-s] [interval]
```

Parameter	Description
-a remotename	Lists the remote computer's name table using its name.
-A IP address	Lists the remote computer's name table using its IP address.

Parameter	Description
-c	Lists the contents of the NetBIOS name cache giving the IP address of each name.
-n	Lists local NetBIOS names. Registered indicates that the name is registered by broadcast (Bnode) or WINS (other node types).
-R	Reloads the LMHOSTS file after purging all names from the NetBIOS name cache.
-r	Lists name resolution statistics for Windows networking name resolution. On a computer configured to use WINS, this option returns the number of names resolved and registered through broadcast or through WINS.
-S	Displays both client and server sessions, listing the remote hosts by IP address only.
-s	Displays both client and server sessions, and attempts to convert the remote host IP address to a name using the HOSTS file.
interval	Displays selected statistics, pausing interval seconds between each display. Press Ctrl+C to stop displaying statistics. Without this parameter, nbtstat prints the current configuration information once.

To run the nbtstat command from the operating system

1 Click Start → Programs → Accessories → Command Prompt to display the command prompt window.

Result: The Command Prompt window appears.

2 At the prompt, type **nbtstat** with the required parameters.

3 Press Enter.

Result: The system runs the nbtstat utility.

4 Type **Exit** to exit the Command Prompt window.

The netstat command

The netstat command displays current TCP/IP network connections and protocol statistics.

Netstat command syntax

The netstat command uses the following syntax:

```
netstat [-a] [-e] [-n] [-s] [-p proto] [-r] [interval]
```

Parameter	Description
-a	Displays all connections and listening ports.
-e	Displays Ethernet statistics. This can be combined with the -s option.
-n	Displays addresses and port numbers in numerical form.
-s	Displays per-protocol statistics.
-p proto	Shows connections for the protocol specified by proto. Proto can be tcp or udp. If used with the -s option, proto can be tcp, udp, or ip.
-r	Displays the contents of the routing table.
interval	Redisplays selected statistics, pausing between each display. Press Ctrl+C to stop redisplaying.

To run the netstat command from the operating system

1 Click Start → Programs → Accessories → Command Prompt to display the command prompt window.

Result: The Command Prompt window appears.

2 At the prompt, type **netstat** with the required parameters.

3 Press Enter.

Result: The system runs the netstat utility.

4 Type **Exit** to exit the Command Prompt window.

Chapter 4

Using CallPilot Manager to monitor hardware

In this chapter

Understanding fault management 60

Section A: Tools for isolating and fixing hardware problems 61

Overview 62

Alarm Monitor 64

Event Browser 67

Maintenance page 70

Channel and Multimedia Monitors 71

Section B: Working with the Maintenance page 73

Introducing the Maintenance page 74

Viewing component states 78

Starting and stopping components 81

Running integrated diagnostics 85

Viewing the last diagnostic results 90

Section C:Working with the Multimedia and Channel Monitors 93

Working with the Multimedia Monitor 94

Working with the Channel Monitor 96

Understanding fault management

Introduction

Fault management is a term that describes how the CallPilot server detects and notifies you of potential or real hardware problems (faults).

The server processes events to detect hardware problems and raises alarms to notify you when these problems occur.

Event processing

An event is any change in system configuration or operational state. An event is also any action taken by the system that requires user notification. Events can be as insignificant as a user logon attempt or as serious as a faulty MPC-8 card switching to disabled status.

All events are reported to the fault management server, a subsystem within the CallPilot server. The fault management server enables the server to listen and respond to its clients. The interaction is called event processing and is the means by which the server detects hardware faults.

Alarm notification

Alarms are warnings generated by events. Alarms communicate the same information as events. However, alarms are reported in the Alarm Monitor instead of the Event Browser, and are managed differently than events.

When an alarm appears in the Alarm Monitor, you must investigate the problem, isolate it, and then fix the cause of the problem. When you fix the problem, the alarm is cleared from the Alarm Monitor.

Section A: Tools for isolating and fixing hardware problems

In this section

Overview 62
Alarm Monitor 64
Event Browser 67
Maintenance page 70
Channel and Multimedia Monitors 71

Overview

Introduction

This section provides guidelines on how to use the CallPilot Manager tools to detect, isolate, and fix potential or real hardware problems.

Component dependencies

The status of some components are dependent on the operational status of other components. If a component fails or is stopped, the dependent components go out of service.

Note: Based on the CallPilot server type, and the type of switch connected to CallPilot, some of these components may not appear on your system.

Component	Dependent components
Motherboard (IPE server)	All MPCs, and all multimedia and call channels associated with the IPE server.
Time Switch	All multimedia and call channels associated with the same MPB as the timeswitch.
MPCs	All multimedia (DSP) channels on the MPC-8 card.
DS30X	All DS30X channels associated with the DS30X link.

Detecting hardware problems

Typically, you first become aware of a hardware problem when an alarm is raised. All hardware faults produce an alarm (or series of alarms, depending on the problem) in the Alarm Monitor.

Other indications of a hardware problem include the following:

- user complaints
- call processing difficulties, such as busy signals, static, dropped calls, connection problems, and cross talk (hearing other conversations)
- system administrator logon difficulties
- alert icons on the Maintenance page

Alarm Monitor

Introduction

Use the Alarm Monitor to investigate one or more raised alarms.

About alarms

Alarms are warnings generated by events. Alarms communicate the same information as events. However, alarms are reported in the Alarm Monitor instead of the Event Browser, and are managed differently than events:

- Alarms appear in the Alarm Monitor only for Minor, Major, and Critical events (not Information events). All events can be reported in the Event Browser (depending on filtering criteria defined in the Event Browser).
- The first time an event occurs, it generates an alarm that appears in the Alarm Monitor. If the same event continues to occur, a new alarm is not generated. Instead, the time and date assigned to the original generated alarm is updated.
- Alarms can be cleared from the Alarm Monitor, but the event that generated the alarm is not cleared from the event log or the Event Browser.


Each alarm in the Alarm Monitor has Help text that often provides a solution to the problem. If the solution is not apparent, use the Event Browser or the Maintenance page to further investigate the problem.

To investigate using the Alarm Monitor

1 Run CallPilot Manager and log in.

2 In CallPilot Manager, click System → Alarm Monitor.

Result: The Alarm Monitor page appears.

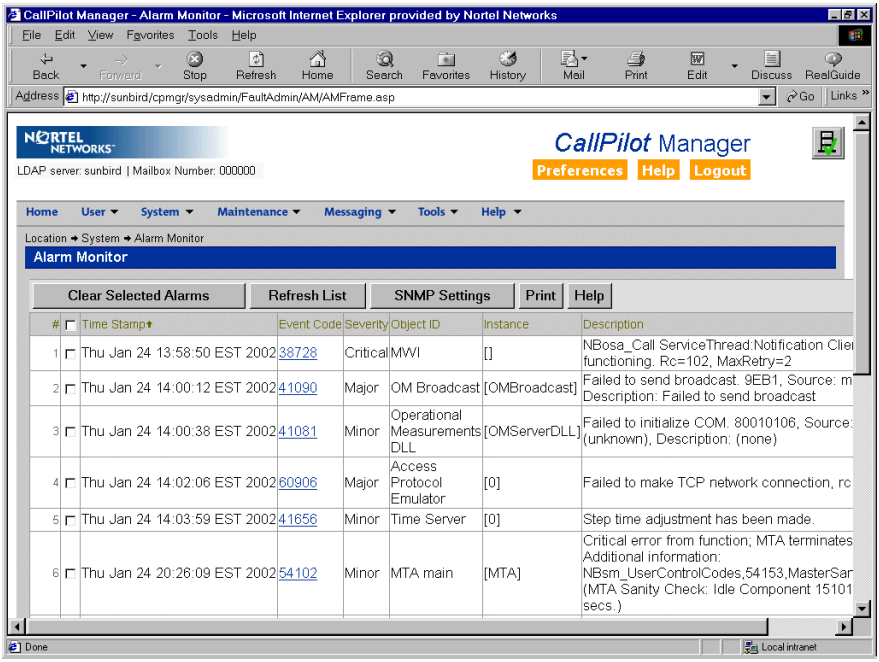

3 Click the Event Code for the first critical or major alarm.

Result: A description of the event appears in a new web browser window.

4 Review the description and recovery action.

5 Repeat steps 3 and 4 for a few more alarms, if necessary.

6 If the solution to the problem is not apparent, obtain the return code of the first event and continue the investigation by using the Event Browser (see “Event Browser” on page 67).

See also

For detailed information on how to use the Alarm Monitor, refer to the *CallPilot Administrator's Guide* (NTP 555-7101-301), or the CallPilot Manager online Help.

Event Browser

Introduction

Use the Event Browser to investigate a series of events that occurred around the time an alarm was raised. The event listing can help you determine the root cause of a problem.

About events


The Event Browser displays events that have been recorded in the server log. Each event identifies the time the event occurred, the object that generated the event, and the cause of the event.

Events are classified as Information, Minor, Major, or Critical. By default, the Event Browser displays only the latest 100 critical events.

To investigate using the Event Browser

1. Run CallPilot Manager and log in.
2. In CallPilot Manager, click System → Event Browser.

   Result: The Event Browser page appears.

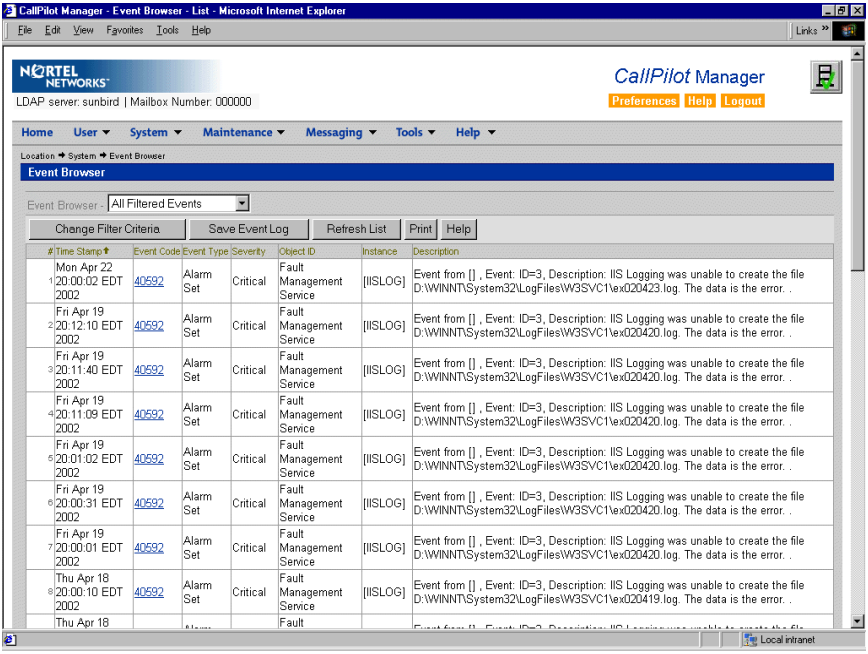

3. Click an event that appears to be related to the problem, or an event that occurred near the time the alarm was raised.

   Result: A description of the event appears in a new web browser window.
4. View the description and recovery action.
5. Repeat steps 3 and 4 for a few more events, if necessary.
6. If the solution to the problem is not apparent, contact your Nortel Networks technical support representative.

See also

For detailed information on how to use the Event Browser (for example, how to set preferences), refer to the *CallPilot Administrator's Guide* (NTP 555-7101-301) or the CallPilot Manager online Help.

Maintenance page

Introduction

Use the Maintenance page to get status information for any suspect components.

If you suspect or discover a problem with hardware such as an MPC-8 card, or the DS30X link, you can use the Diagnostic section on the Maintenance page. You can run a new diagnostic for the component, or review the results of the last diagnostic that was run.

More information

For information on all aspects of the Maintenance page, see Section B: “Working with the Maintenance page” on page 73, or the CallPilot Manager online Help.

Channel and Multimedia Monitors

Introduction

The Channel Monitor shows the status of call channels. The call channels are the connections between the server and the switch that carry the call signals to CallPilot.

The Multimedia Monitor shows the status of multimedia channels. The multimedia channels are the DSP ports that process the calls. They are the voice, fax, and speech recognition channels.

Disabling call channels

If you must take the CallPilot system out of service to perform software or hardware maintenance, Nortel Networks recommends that you disable all call channels first. There are two ways to disable the call channels:

- Courtesy stop the channels (preferred method).

  When you courtesy stop call channels, CallPilot waits until the channels are no longer active before disabling them, instead of suddenly terminating active calls.

- Stop the channels.

  When you stop channels, you suddenly disable them and terminate all active calls.

For information about using the Channel and Multimedia Monitors, see Section C: “Working with the Multimedia and Channel Monitors” on page 93.

Running diagnostics on call channels

If you must run diagnostics for one or more channels, use the Diagnostics section on the Maintenance page. For more information, see “Working with the Maintenance page” on page 73.

Section B: Working with the Maintenance page

In this section

Introducing the Maintenance page 74
Viewing component states 78
Starting and stopping components 81
Running integrated diagnostics 85
Viewing the last diagnostic results 90

Introducing the Maintenance page

Introduction

Use the Maintenance page in CallPilot Manager to do the following:


- Obtain general information about components.
- View component states.
- Start and stop components.
- Run integrated diagnostic tests.
- View the results of the last diagnostic test run against a component.

What the Maintenance page provides

The Maintenance page identifies the server platform and switch connectivity type. It also provides a tree that, when expanded, lists the physical and logical hardware components down the left side of the page. To list the server's hardware components, click the plus sign (+) at the top of the tree. To list the subcomponents for each component, click the plus sign (+) beside the component.

Note: The components that are listed on the Maintenance page are based on the CallPilot server type and the switch that is connected to CallPilot. The examples in this chapter are for illustration purposes and may not appear exactly the same on your system.

The following is an example of a partially expanded tree for the 201i server:

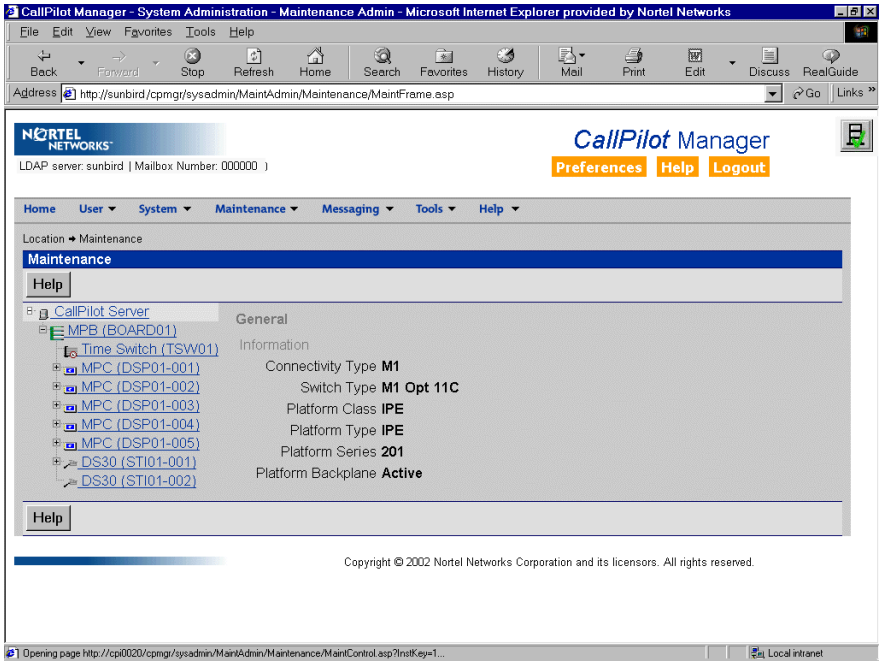

When you click a component, the page refreshes to show the details about that component. Details are divided into the sections described in the following table:

Section	Description
General	This section shows general technical information about the selected component. This typically includes the following details: ■ the name, class, type, series, or version of a component ■ various capabilities of a component (for example, whether a component is removable) **Note:** This section does not appear for all components.

Section	Description
Maintenance	This section shows the state of the selected component. Use this section to start and stop a component before running a diagnostic test. This section appears only for components on which you are allowed to perform maintenance administration. For more information about working with component states, see the following sections: ■ "Viewing component states" on page 78 ■ "Starting and stopping components" on page 81
Diagnostics	Use the Diagnostics section to run one or more diagnostic tests, or to view the results of the last diagnostic tests that were run on the selected component. This section appears only for components on which you are allowed to run diagnostics. For more information about running diagnostics, see the following sections: ■ "Running integrated diagnostics" on page 85 ■ "Viewing the last diagnostic results" on page 90

Maintenance activities for each component

The following table identifies the maintenance activities you can perform for each component that is listed in the component tree:

Component	Start, stop?	Courtesy stop?	Diagnostics available?	Replaceable?
Motherboard	Yes	No	Yes	Yes (IPE server)
Media Bus	Yes	No	Yes	No
MPB board	Yes	No	Yes	Yes
Time Switch	No	No	No	No
MPCs (embedded on MPB boards or on MPC-8 cards) (embedded on the IPE server or on MPC-8 cards)	Yes	No	Yes	embedded: No MPC-8 cards: Yes
Multimedia channels	Yes	Yes	Yes	No
Call channels	Yes	Yes	No	No
DS30X link	Yes	No	No	No

Note: The MGate card and DS30X cable are replaceable. If you are having problems with the DS30X link, determine if either one or both of those items are causing the problem and need to be replaced.

Viewing component states

Introduction

View a component's state to determine the general condition of the component, including whether the component is disabled or off duty. The component's state is shown in the Maintenance section of the Maintenance page.

Component states

You can determine the state of a component by looking at the State box in the Maintenance section.

State	Description
Active	The component is working and currently involved in processing a call.
Disabled	The diagnostic failed.
Idle	The component is working but not currently involved in processing a call.
InTest	A diagnostic is running on the resource or device.
Loading	The component has been started, which takes it out of the Off Duty state. This state occurs quickly and is immediately followed by Idle.
No resources	The hardware required for the component to operate is not installed or is not operating properly.

State	Description
Not Configured	The device is not configured in CallPilot. For example, a DSP is not being used because it was not allocated in the Configuration Wizard.
Off Duty	The component has been stopped.
Remote Off Duty	The component has been taken out of service at the switch.
Shutting Down	The component is in the process of stopping. This state occurs quickly and is immediately followed by Off Duty.
Uninitiated	The call processing component has not initialized the resource.

Alert icons

If one of the following icons appears next to a component in the tree, then the component or one of its subcomponents is experiencing a problem:

Icon	Description
	A problem exists with a subcomponent of the selected component. Expand the tree to locate the subcomponent with the problem.
	A problem exists with the selected component.


To view the state of a hardware component

1. Run CallPilot Manager and log in.
2. In CallPilot Manager, click Maintenance → Maintenance Admin.

   Result: The Maintenance page appears.
3. Click the plus sign (+) beside the CallPilot server to expand the component tree.
4. Continue clicking the plus sign (+) until the component with which you want to work is visible.
5. Click the hardware component with which you want to work.

   Result: The Maintenance page refreshes to show details about the component.
6. Scroll down to the Maintenance section.

   The following is an example of the Maintenance section for an MPC-8 card:

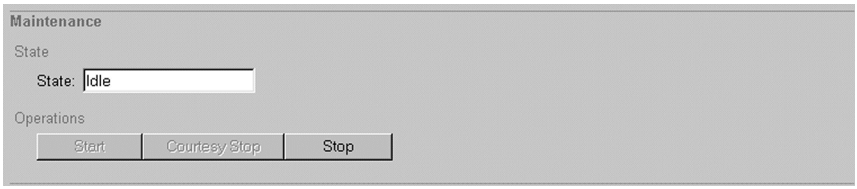

7. View the state of the selected component in the State box.

Starting and stopping components

Introduction

When you stop a component, you take it out of service and prevent it from operating. You must stop a component before you can replace it (if the component is replaceable) or run a diagnostic test on it.

To bring an out-of-service component back into service, you must start it.

Start and stop components from the Maintenance section on the Maintenance page.

ATTENTION

Nortel Networks recommends that, if possible, you courtesy stop a component. Courtesy stop is available only at the individual channel level.

To courtesy down CallPilot, use the following:

- Multimedia Monitor: to courtesy stop a range of multimedia channels
- Channel Monitor: to courtesy stop a range of call (DS30X, also known as DS0) channels

For instructions, see Section C: "Working with the Multimedia and Channel Monitors" on page 93.

Stop versus Courtesy stop

The following two methods of taking a component out of service allow you to choose how active calls are affected:

Courtesy stop

A Courtesy stop takes the component out of service only after the component has finished processing the active call.

- If the component is currently processing a call, the call is not dropped; the component remains active until the call is finished.
- If the component is not currently in use, it is taken out of service immediately.

Courtesy stop is preferred over a regular Stop.

Stop

A Stop takes the component out of service immediately, regardless of whether the component is currently processing calls. All active calls are dropped. Typically, you perform a Stop only when severe problems that are affecting a large number of incoming calls occur or if your organization determines a special need for it.

Components that can be started and stopped

Only the following components can be started and stopped:

Note: If you want to start or stop more than one or two multimedia (DSP) or call (DS30X) channels, use the Multimedia Monitor or Channel Monitor. For instructions, see Section C: "Working with the Multimedia and Channel Monitors" on page 93.

Component	Effect of stopping
Motherboard (IPE server)	Takes all call processing resources on the selected board out of service.
Time Switch	You cannot perform maintenance administration on the timeswitch.
MPCs (embedded on the IPE server or on MPC-8 cards)	Takes the selected MPC out of service.
Multimedia channels	Takes the selected DSP out of service.

Component	Effect of stopping
Channels	Takes the selected DS30X channel out of service.
DS30X link	Takes the selected DS30X link out of service.


To start or stop a component

1. Run CallPilot Manager and log in.
2. In CallPilot Manager, click Maintenance → Maintenance Admin.

   Result: The Maintenance page appears.
3. Click the plus sign (+) beside the CallPilot server to expand the component tree.
4. Continue clicking the plus sign (+) until the component with which you want to work is visible.
5. Click the hardware component that you want to start or stop.

   Result: The Maintenance page refreshes to show details about the component.
6. Scroll down to the Maintenance section.

   The following is an example of the Maintenance section for an MPC-8 card:

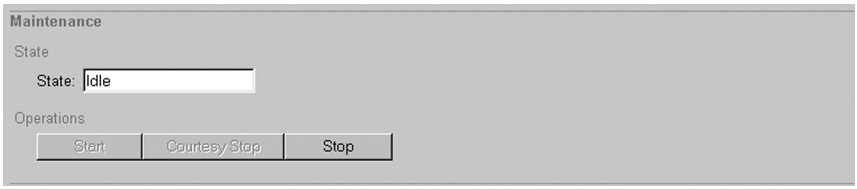

7 Click Courtesy Stop, Stop, or Start, as required.

Button	Description
Start	If the selected component is out of service, click this button to put it into service.
Courtesy Stop	Click this button to take the selected component out of service. CallPilot waits for the call to be completed before disabling the component. **ATTENTION** If you are courtesy stopping all components (that is, you are taking the entire system down), ensure that you inform all administrators, desktop messaging users, and web messaging users so that they can log off their sessions before you proceed. The system asks you to confirm the Courtesy stop. If you click OK, the component is put out of service after all calls are finished.
Stop	Click this button to take the selected component out of service immediately. All calls that are in progress are disconnected immediately. **ATTENTION** If you are stopping all components (that is, you are taking the entire system down), ensure that you inform all administrators, desktop messaging users, and web messaging users so that they can log off their sessions before you proceed.

Running integrated diagnostics

Introduction

You should run diagnostic tests from the Diagnostics section on the Maintenance page in the following circumstances:

- You want to ensure that a component is operating properly after installing or reinstalling it.
- The CallPilot server is having trouble processing incoming calls and you are hoping that diagnostic results can tell you why.

  Problems include static, dropped calls, and cross talk (hearing another conversation).

Before you begin

ATTENTION

Take the component out of service before you run the diagnostic test. See "Starting and stopping components" on page 81.

Components that have diagnostic tests available

The following table identifies the components on which you can run diagnostics:

Component	Diagnostics available?	Replaceable?
Motherboard	Yes	Yes (IPE server)
Time Switch	No	No

Component	Diagnostics available?	Replaceable?
MPCs (embedded on the IPE server or on MPC-8 cards)	Yes	Embedded: No MPC-8 cards: Yes
Media channels	No	No
Call channels	No	No
DS30X link	No	No

Diagnostic tests available for each component

The diagnostic tests that are available for each component are listed in the Diagnostic section of the Maintenance page. To view the list of diagnostic tests for a particular component, click the component in the component tree.

If a diagnostic test fails or cannot be run

If a warning message appears, the diagnostic test cannot be run because a prerequisite condition has not been met. If a diagnostic test fails, a message appears in a new browser window (see the example on page 89).

In both cases, check the Alarm Monitor to determine the reason and the appropriate action to take. (See “Tools for isolating and fixing hardware problems” on page 61.)

If the Alarm Monitor and Event Browser do not provide a solution to a hardware problem, you may need to replace or service a component. If the problem is with a component that is not replaceable because it is not a physical entity (such as the Time Switch), you must either replace its parent component or contact your Nortel Networks technical support representative, depending on the component.

To run a diagnostic test

ATTENTION

Nortel Networks recommends that you courtesy stop rather than stop a component if possible. For instructions, see "Starting and stopping components" on page 81.

1. Run CallPilot Manager and log in.
2. In CallPilot Manager, click Maintenance → Maintenance Admin.


   Result: The Maintenance page appears.
3. Click the plus sign (+) beside the CallPilot server to expand the component tree.
4. Continue clicking the plus sign (+) until the component with which you want to work is visible.
5. Click the hardware component for which you want to run diagnostics.

   Result: The Maintenance page refreshes to show details about the component.
6. Scroll down to the Maintenance section, and ensure that the component is out of service.

   Note: For instructions on taking the component out of service, see "To start or stop a component" on page 83.

7 Scroll down to the Diagnostics section.

Result: The following is an example of the Diagnostics section for an MPC-8 card (removable MPC):

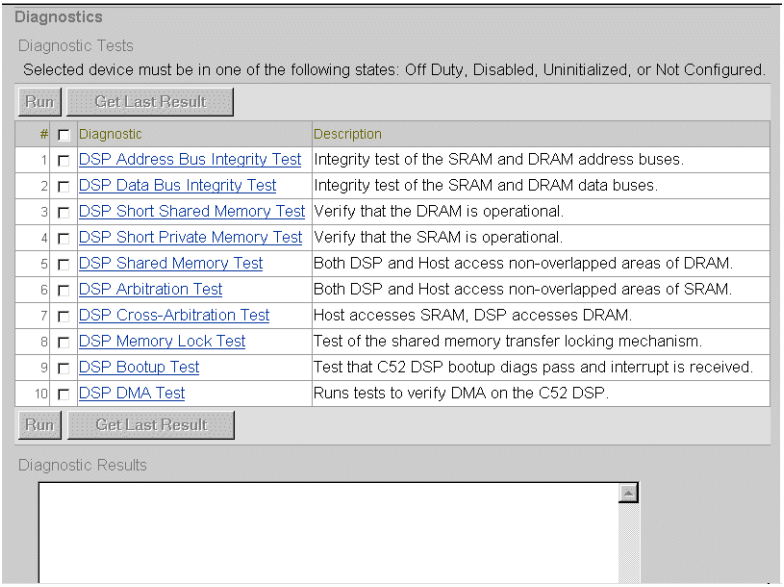


8 Check the check box for each diagnostic that you want to run.

Note: If you want to run all of the diagnostics, check the Diagnostic Description check box at the top of the list.

9 Click Run.

Result: A new web browser window opens to display the progress and results of the diagnostics:

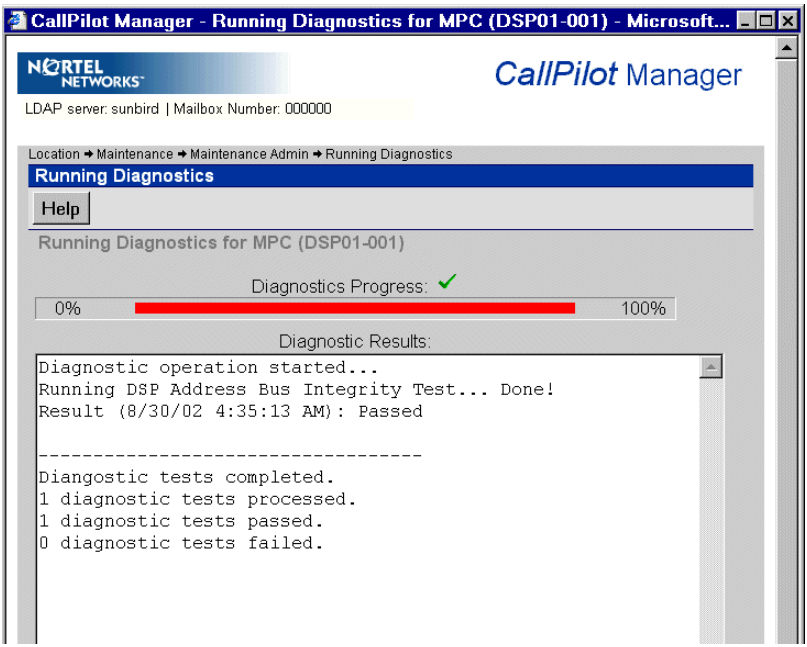

Note: The Diagnostic Results box in the Diagnostics section displays diagnostic results when you click Get Last Result.

Viewing the last diagnostic results

Introduction

You can review the results of previously run diagnostics by clicking the Get Last Results button for a component.

To view the last diagnostics result

ATTENTION

Nortel Networks recommends that you courtesy stop rather than stop a component if possible. For instructions, see "Starting and stopping components" on page 81.


1. Run CallPilot Manager and log in.
2. In CallPilot Manager, click Maintenance → Maintenance Admin.

   Result: The Maintenance page appears.
3. Click the plus sign (+) beside the CallPilot server to expand the component tree.
4. Continue clicking the plus sign (+) until the component with which you want to work is visible.
5. Click the hardware component for which you want to run diagnostics.

   Result: The Maintenance page refreshes to show details about the component.

6 Scroll down to the Diagnostics section.


Result: The following is an example of the Diagnostics section for an MPC-8 card (removable MPC):

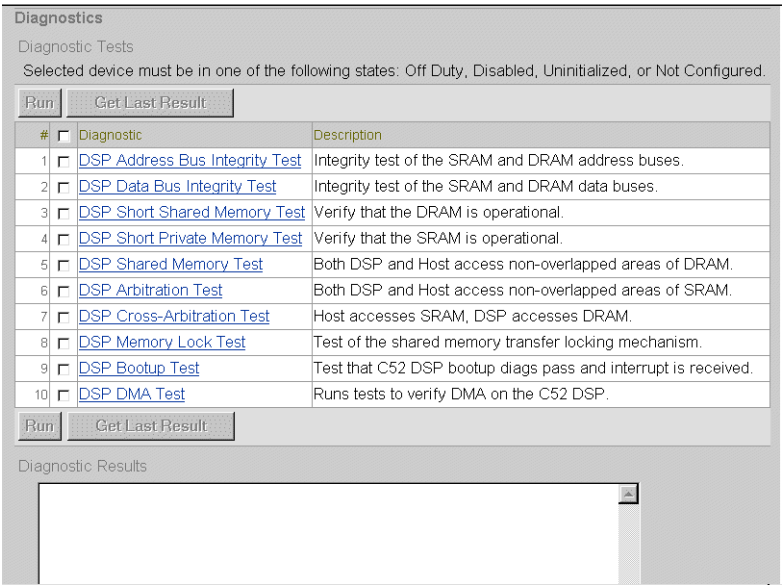

7 Check the check box for each diagnostic for which you want to review results.

8 Click Get Last Result.

Result: The results appear in the Diagnostic Results box.

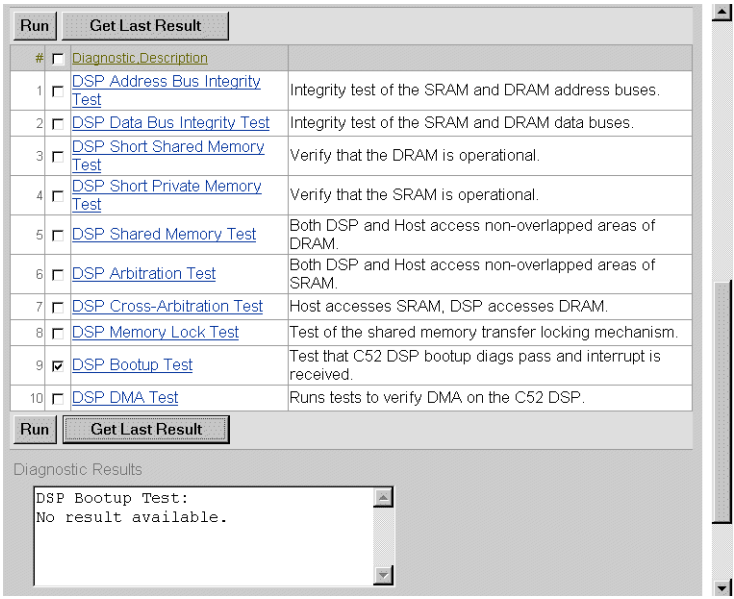

Last diagnostic results

The results of the last diagnostic test display the following information in the Diagnostic Results box:

- diagnostic title
- diagnostic result: pass or fail
- the date and time the test was completed

Section C: Working with the Multimedia and Channel Monitors

In this section

Working with the Multimedia Monitor 94

Working with the Channel Monitor 96

Working with the Multimedia Monitor

Introduction


The Multimedia Monitor shows the status of multimedia channels. The multimedia channels are the DSP ports that process the calls. They are the voice, fax, and speech recognition channels.

To view or work with multimedia channel states

1 Run CallPilot Manager and log in.

2 In CallPilot Manager, click Maintenance → Multimedia Monitor.

Result: The Multimedia Monitor page appears, showing the channels associated with each DSP.

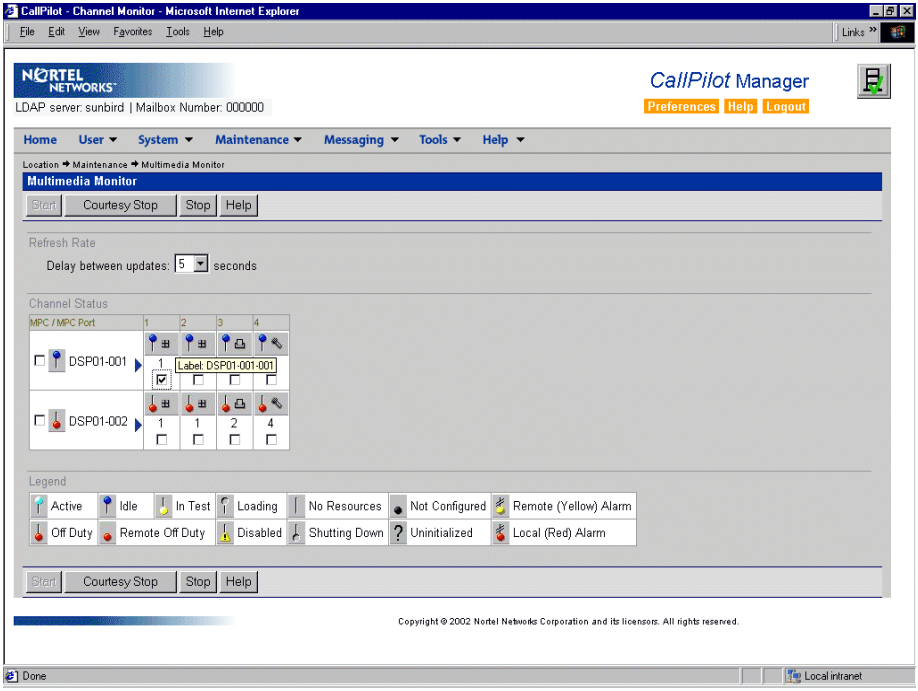

Note: For an explanation of the channel states, refer to the CallPilot Manager online Help.

3 Do one of the following:

IF you want to stop or start	THEN
all of the channels associated with a DSP	check the check box to the left of the DSP that you want to stop or start. Repeat this step for each DSP.
only one or several channels that are associated with a DSP	check the check box for each channel that you want to stop or start.

4 Click Courtesy Stop, Stop, or Start as required.

Result: If you clicked Courtesy Stop or Stop, you are asked to confirm the Courtesy Stop or Stop. Click OK.

The selected channels change to off-duty or on-duty status, according to the action you chose.

Note: If the buttons are not available, wait a few seconds for the page to refresh.

Working with the Channel Monitor

Introduction


The Channel Monitor shows the status of call channels. The call channels are the connections between the server and the switch that carry the call signals to CallPilot.

To view or work with call channel states

1 Run CallPilot Manager and log in.

2 In CallPilot Manager, click Maintenance → Channel Monitor.

Result: The Channel Monitor page appears, showing the DS30X (also known as DS0) channels associated with each DS30X link.

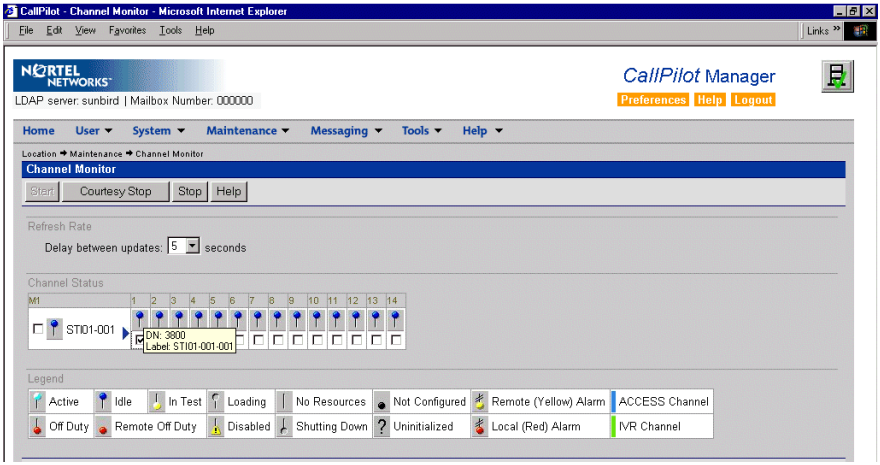

Note: For an explanation of the channel states, refer to the CallPilot Manager online Help.

3 Do one of the following:

IF you want to stop or start	THEN
all of the channels associated with a DS30X link	check the check box to the left of the DS30X link that you want to stop or start. Repeat this step for each DS30X link.
only one or several channels that are associated with a DS30X link	check the check box for each channel that you want to stop or start.

4 Click Courtesy Stop, Stop, or Start, as required.

Result: If you clicked Courtesy Stop or Stop, you are asked to confirm the Courtesy Stop or Stop. Click OK.

The selected channels change to off-duty or on-duty status, according to the action you chose.

Note: If the buttons are not available, wait a few seconds for the page to refresh.

Chapter 5

Using CallPilot system utilities

In this chapter

Overview 100

Diagnostics Tool 101

PEP Maintenance utility 104

System Monitor 106

Overview

Introduction

The following table lists the CallPilot system utilities:

Utility	Description
Diagnostics Tool	Allows CallPilot startup diagnostics to be enabled or disabled (turned on or off).
PEP Maintenance	Displays a list of installed PEPs and enables PEP uninstall.
System Monitor	Displays the following information: ■ the status of all CallPilot channels ■ the status of all CallPilot services **Note:** This status is more accurate than the status that operating system provides in the Services control panel. ■ particulars about the CallPilot System, such as names, keycodes, serial numbers, IP addresses, and system numbers

Accessing the system utilities

All CallPilot utilities are accessible from the CallPilot server in the Start → Programs → CallPilot → System Utilities menu.

Diagnostics Tool

Introduction

The Diagnostics Tool allows you to enable or disable CallPilot startup diagnostics.

CallPilot startup diagnostics automatically identify hardware problems that may exist when the system and its services are started (DSP, TimeSwitch, MediaBus).

When you disable startup diagnostics, you can save time during system maintenance operations where restarts or Call Processing services restarts are required.


There are three recommended steps:

- Use the Diagnostics tool to turn off CallPilot startup diagnostics.
- Perform system maintenance.
- Use the Diagnostics tool to turn on CallPilot startup diagnostics.

To access the Diagnostics Tool

On the Windows desktop, click Start → Programs → CallPilot → System Utilities → Diagnostic Tool.

Result: The Diagnostics Tool window appears.

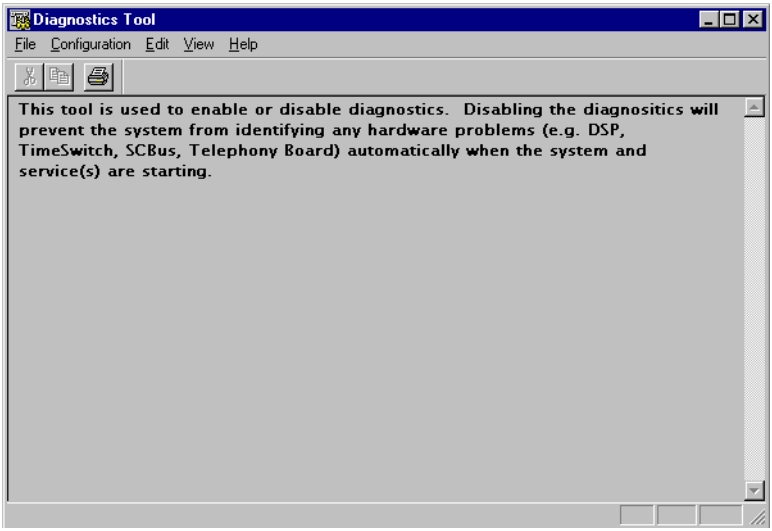

To enable startup diagnostics

From the Diagnostics Tool window, select Configuration → Maintenance Startup Diag → Enable.

To disable startup diagnostics

ATTENTION

Nortel Networks recommends that you leave the startup diagnostics turned on.

When you disable CallPilot startup diagnostics, you prevent CallPilot from automatically identifying hardware problems that may exist when the system and its services are started (DSP, TimeSwitch, MediaBus).

On the Diagnostics Tool window, select Configuration → Maintenance Startup Diag → Disable.

PEP Maintenance utility

Introduction


The PEP Maintenance utility displays a list of all installed PEPs on the server and enables you to uninstall PEPS.

For information on installing or uninstalling PEPs, refer to the *CallPilot Software Administration and Maintenance* guide.

To access the PEP Maintenance utility

From the Windows desktop, click Start → Programs → CallPilot → System Utilities → PEP Maintenance Utility.

Result: The DMI Viewer window appears.

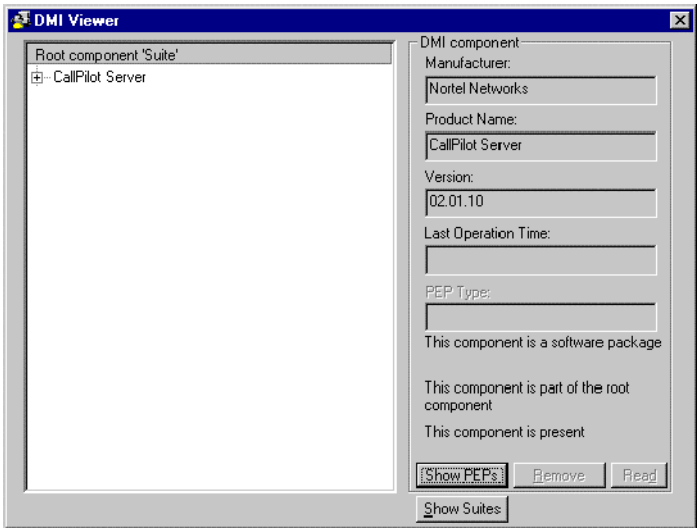


To view a list of all installed PEPs

1. Click the component for which you want to display the PEP list.
2. Click Show PEPs.

   Result: A list of all installed PEPs appears in the left pane.
3. If you want to review the readme file associated with a PEP, click the PEP, and then click Read.

   Result: The readme file opens in Notepad.

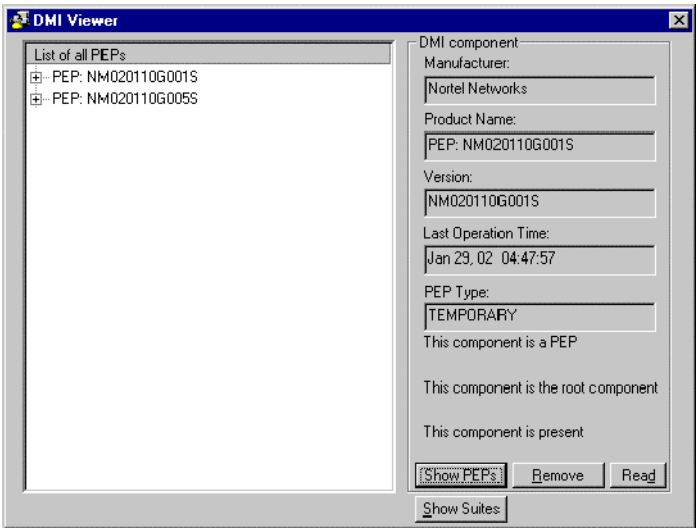

System Monitor

Introduction

The System Monitor consists of three tabs, as described in the table below:

Tab	Description
Channel Monitor	Shows the status of all CallPilot services, multimedia channels (DSP channels), and call channels (DS30X channels).
System Info	Displays particulars about the CallPilot System, such as features purchased, keycode, serial number, and CallPilot server IP addresses.
Legend/Help	Provides a description of icons and terminology displayed in the System Monitor window.

System Monitor is a nondestructive tool that does not alter the behavior of any CallPilot components.


To access the System Monitor

On the Windows desktop, click Start → Programs → CallPilot → System Utilities → System Monitor.

Result: The CallPilot System Monitor window appears. By default, the Channel Monitor tab appears on top. Click the other tabs to view the information on those tabs.

About the Channel Monitor tab

The following is an example of the Channel Monitor tab, followed by a description of its contents:

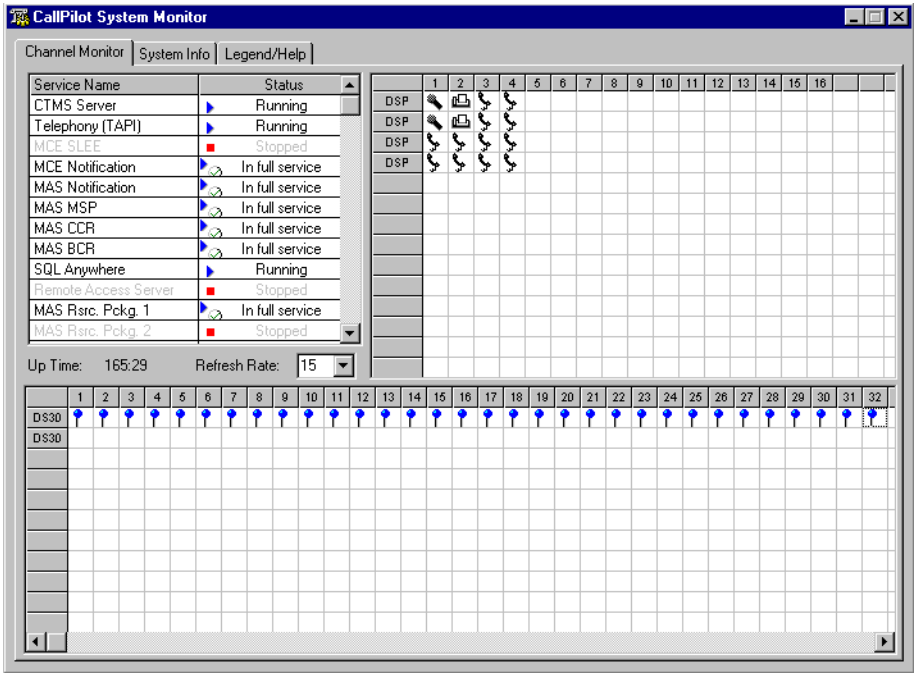

CallPilot services

The Service Name pane shows the status of services from a CallPilot perspective. The status shown in the operating system Services control panel may state that a service is running, but it may not actually be fully running or in service from a CallPilot perspective. Refer to the System Monitor tool Channel Monitor tab for the true status.

The services listed under Service Name should be either running or in full service when CallPilot is functioning optimally. If any CallPilot services are stopped, investigate the cause of this. Call Nortel Networks technical support for assistance.

Note: While any stopped services should be investigated, some services are not critical. CallPilot may continue to handle call processing even with some services stopped.

The critical services that are needed for basic CallPilot call answering are listed in the following table. For your reference, the equivalent names as they appear in the Windows Control Panel are also listed.

CallPilot System Monitor	Windows Control Panel equivalent
CTMS Service	CTMS Server
Telephony (TAPI)	Telephony Service
MCE SLEE	CallPilot SLEE Service
MCE Notification	CallPilot MWI Service
MAS Notification	CallPilot Notification Service
MAS CCR	CallPilot Call Channel Router
MAS BCR	CallPilot Blue Call Router
SQL Anywhere	Adaptive Server Anywhere - %ComputerName%_SQLANY
MAS MltmediaCache	CallPilot Multimedia Cache
MAS MltmediaVol1	CallPilot Multimedia Volume 1
MAS MltmediaVol102 (TRP only)	CallPilot Multimedia Volume 102 (TRP only)
MAS MltmediaVol103 (TRP only)	CallPilot Multimedia Volume 103 (TRP only)
MAS Rsrc. Pckg. 1	CallPilot Resource Package1

DSPs

In the DSP pane, each DSP is represented in a separate row. Each box in the row is one DSP channel or multimedia channel. Click the Legend/Help tab to view descriptions of the multimedia channel icons.

For 201i servers, DSPs reside on the motherboard and on MPC-8 cards. DSPs are distributed as follows:

- The 201i server contains one embedded DSP with up to four MPC-8 cards.
- Each MPC-8 card contains a single DSP.


DS30X links

In the DS30X link pane, each DS30 row represents a separate DS30X link (also referred to as a DS30 link). Each box in the row represents one DS30X channel.

For the 201i server, the DS30X link to the switch is supported by the connection of the server to the switch backplane.

About the System Info tab

The following is an example of the System Info tab, followed by a description of its contents:

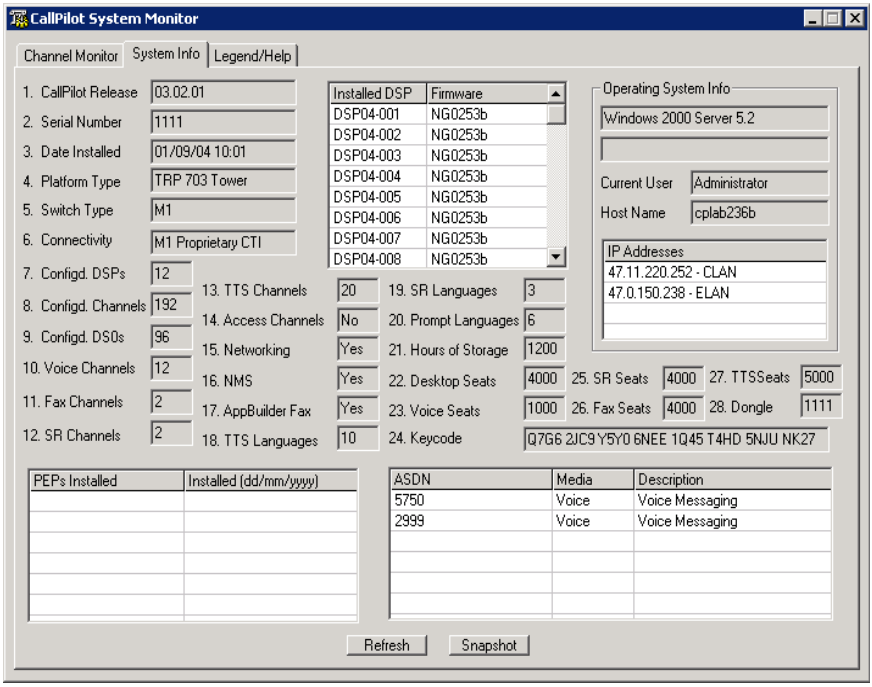


The numbered items provide information about the features purchased. Information about the underlying operating system is provided in the top right corner, including the server IP addresses.

PEP information and configured Service DNs are listed in the bottom part of the window.

About the Legend/Help tab

The following is an example of the Legend/Help tab. Consult this window for descriptions of the icons found in the Channel Monitor tab:

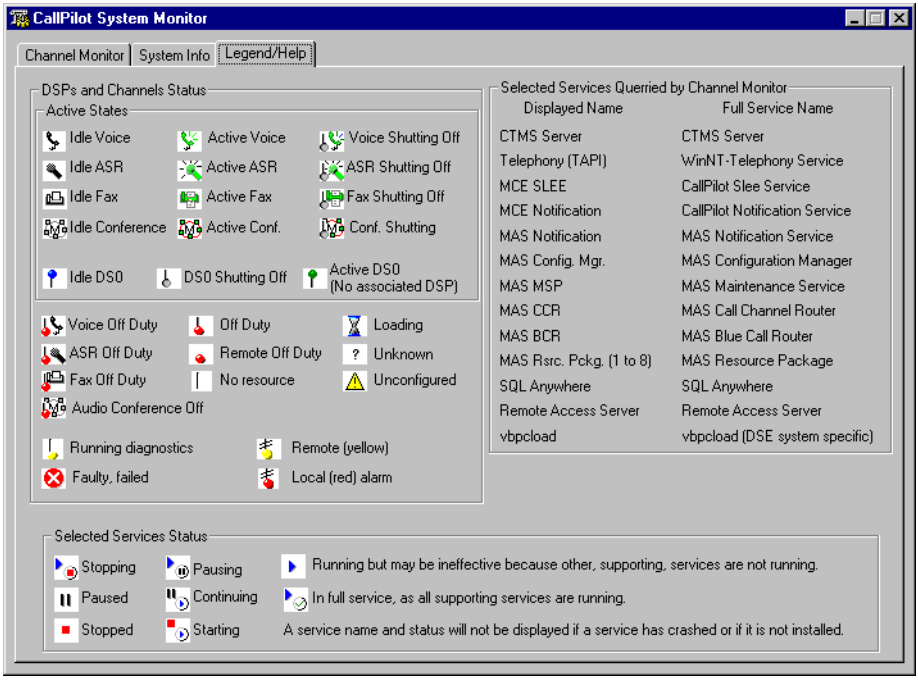

Chapter 6

Performing hardware maintenance and mechanical assembly

In this chapter

Overview 114
Removing the server from the switch 115
Replacing the server 117
Replacing the IDE hard drive 122
Replacing the software feature key 129
Replacing Multimedia Processing Cards 131

Overview

Introduction

Before you can begin component replacement, you must do the following:

- Gather the tools you need.
- Remove the 201i server from the switch.
- Become familiar with component layout on the 201i server.

Equipment required

You need the following tools, based on the component you are replacing:

- antistatic wrist strap or antistatic mat
- Phillips No. 1 and No. 2 screwdrivers
- tweezers

Before you begin

Shut down the server software. Then remove the server from the switch and lay it on a static-resistant surface, with the component side facing up.

If you need to replace the entire 201i server, review "Replacing the server," on page 117. Then review the procedures for installing the server and conducting diagnostic tests.

Removing the server from the switch

Introduction

You must remove the server from the switch before you replace the following components:

- hard drive
- software feature key (dongle)

Note: You can replace an MPC-8 card without powering down the 201i server.

Equipment required

The following equipment is required for this procedure:

- antistatic mat
- antistatic wrist strap

To remove the server from the switch

1. Power down the server by unseating it from the back plane. Wait 15 seconds to complete powering down, then remove the server.

   For instructions, refer to the *CallPilot Installation and Configuration Task List*.

2. Turn off the monitor.
3. Disconnect the monitor, keyboard, and mouse.
4. Power down the peripheral SCSI devices, and disconnect the SCSI cable.
5. Open the lock latches at the top and bottom of the server.
6. Grip the faceplate, and then unseat the server from the switch. Wait 15 seconds, then remove the server.

7 Place the server on a clean, static-resistant surface.

What's next?

Replace and upgrade components, as required.

Replacing the server

Introduction

Replace the server only if you are instructed to do so. For activities that are not supported as field procedures, you must return the server to Nortel Networks for service.

This section summarizes the procedure for replacing the server. References are made to specific component replacement procedures where applicable.

To replace the server

1. If the installed server is functional, perform a complete backup of the hard disk as a precautionary measure.
2. Use the Maintenance screen in CallPilot Manager to take the installed MPC-8 cards out of service (see page 81).
3. Remove the MPC-8 cards from the faceplate of the server (see page 131).
4. Shut down the installed server (refer to "Starting up and shutting down the CallPilot server" in the *CallPilot Installation and Configuration Task List*).
5. Power down the server by unseating it from the back plane. Wait 15 seconds to complete powering down, then remove the server.
6. Disconnect all peripherals from the server.
7. Remove the server from the switch (see page 115).
8. Remove the software feature key (dongle) from the defective server, and then install it in the replacement server (see page 129).
9. Remove the hard drive from the defective server, and then install it in the replacement server (see page 124).
10. Install the replacement server on the switch, and then reconnect the peripherals.

11 Install the MPC-8 cards removed from the defective server (see page 135).


12 Boot the server to the operating system.

13 Run the Configuration Wizard to configure the new hardware.

For instructions, refer to the *CallPilot <switch model> and CallPilot Server Configuration* guide for your switch and server.


201i server component diagram: exploded view

The following diagram identifies component locations on the 201i server:

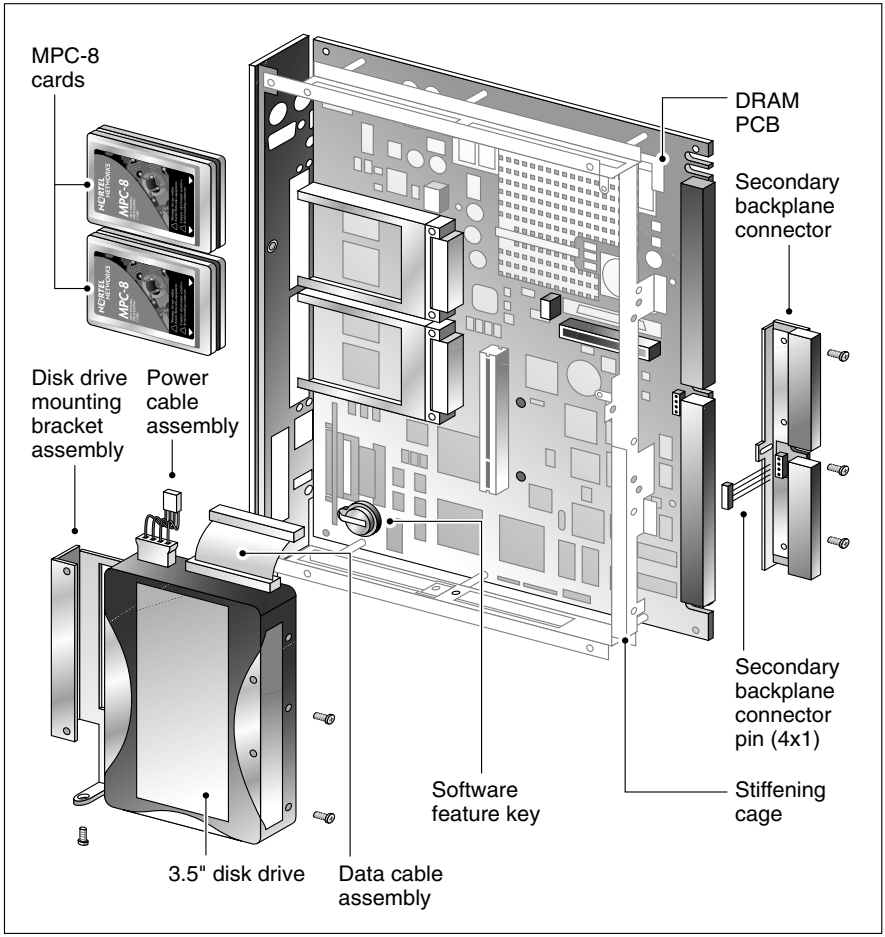

201i server component diagram: complete assembly

The following diagram shows the 201i server when it is completely assembled:

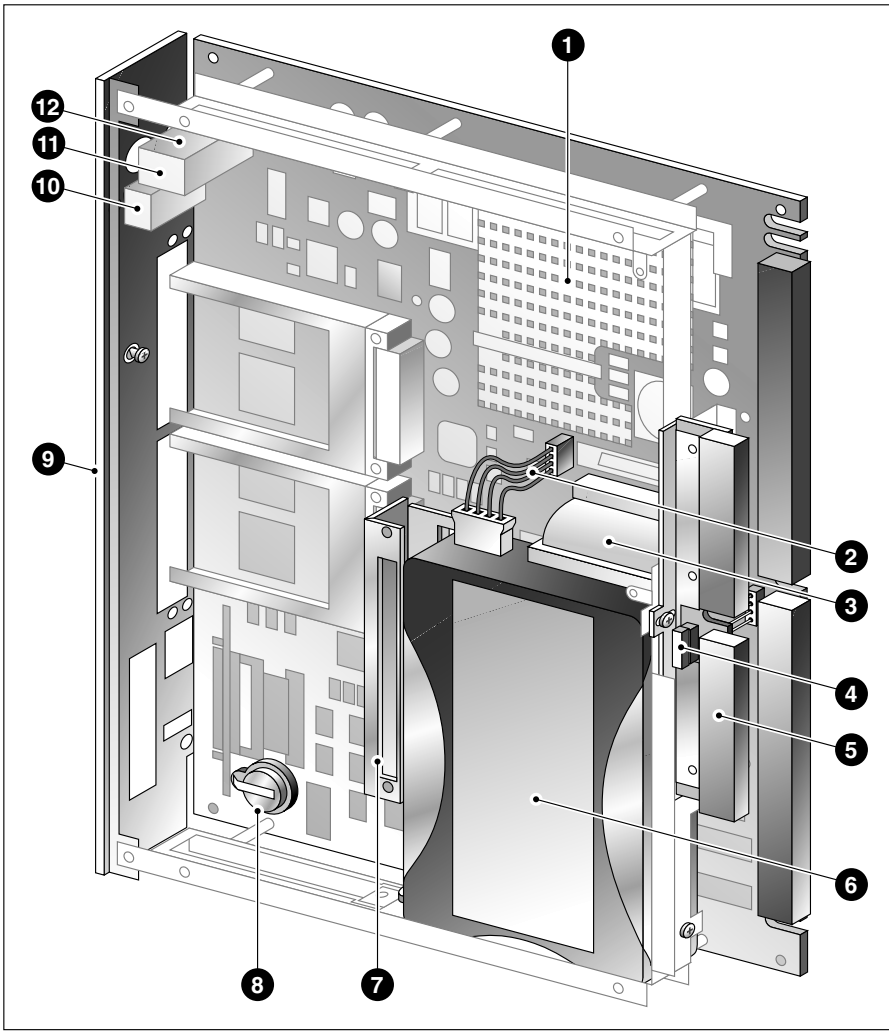

Legend

Item	Description
1	Heat sink
2	Hard drive power cable
3	Hard drive data cable
4	Secondary backplane connector pin
5	Secondary backplane connector
6	3.5" IDE hard drive
7	Hard drive mounting bracket
8	Software feature key (dongle)
9	Faceplate
10	Monitor connector
11	Mouse connector
12	Keyboard connector

Replacing the IDE hard drive

Introduction

The hard drive rests lengthwise along the backplane side of the server. The hard drive is secured in place by five screws-two on the backplane edge, two through the motherboard, and one through the bottom edge of the stiffener.

Equipment required

The following equipment is required for this procedure:

- antistatic wrist strap
- Phillips No. 1 screwdriver


Before you begin

Before you replace the hard drive, review the following:

- "Removing the server from the switch," on page 115
- the "201i server component diagram: exploded view," on page 119

Hard drive assembly diagram

The following diagram shows the hard drive in its assembled state:

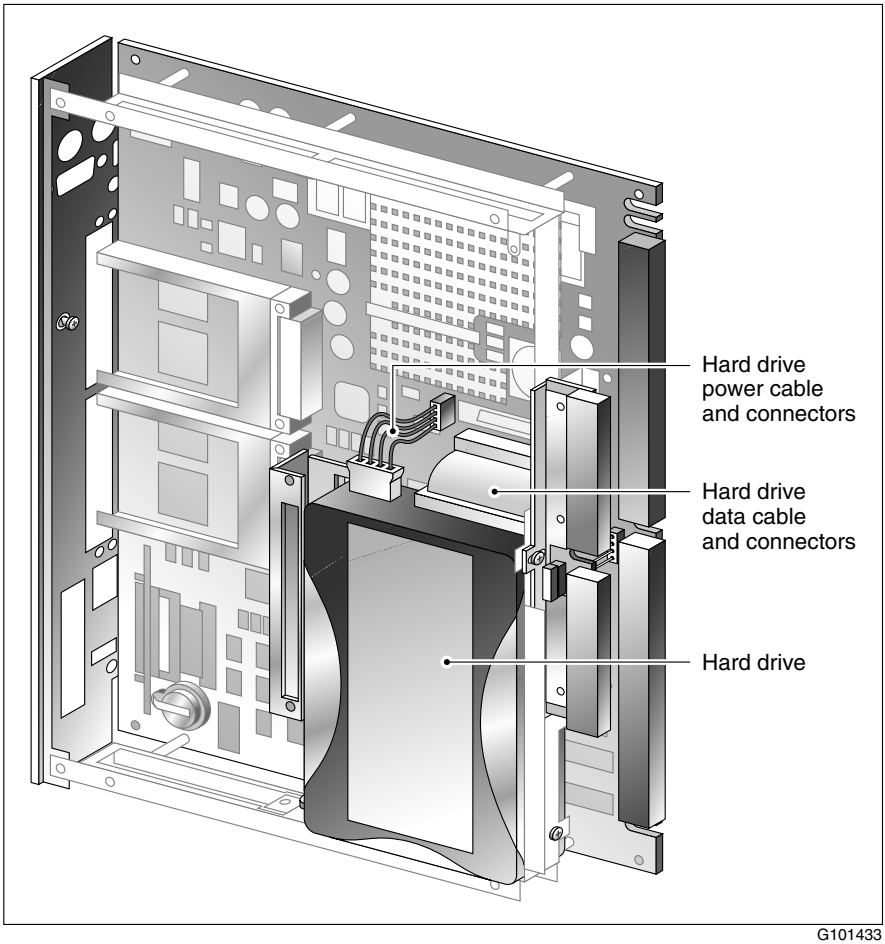

To remove the IDE hard drive


1 Do the following:

a. Remove the two screws on the back of the motherboard.

b. Remove the screw on the stiffening cage.

c. Remove the two screws on the hard drive's stiffener cage (along the backplane edge of the server).


See the following diagram:

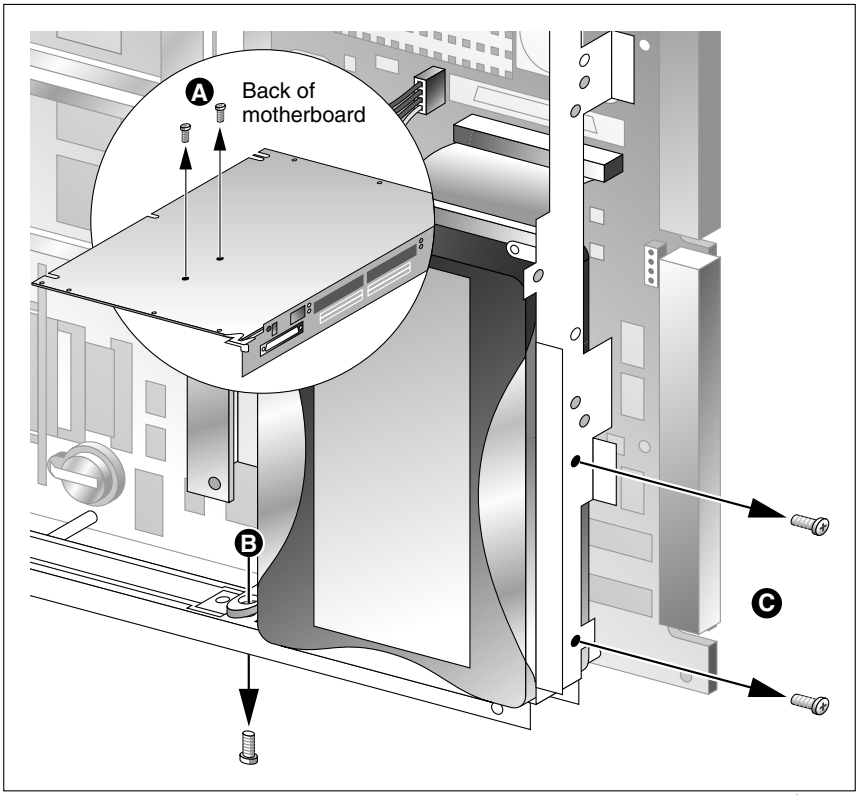

2 Do the following:

a. Dislodge the power cable from its connector and lift it away from the motherboard.


b. Slide one hand as far as you can beneath the hard drive so that it is securely supported and you can touch the data cable connector on the motherboard.

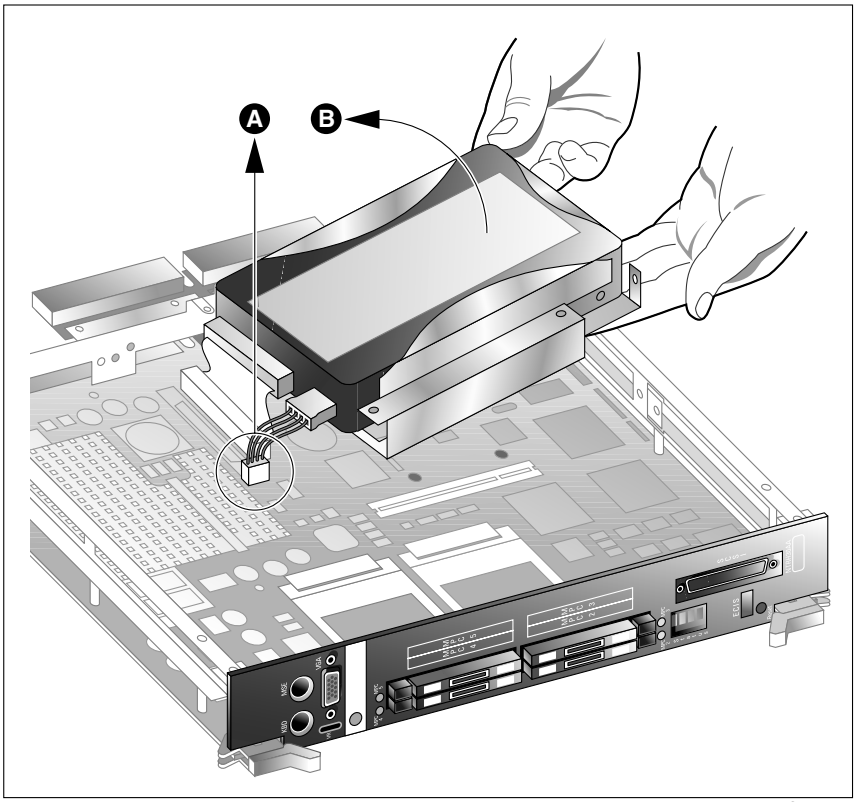

G101447

3 Use the pull tabs to gently remove the data cable connector from the motherboard.

See the following diagram:

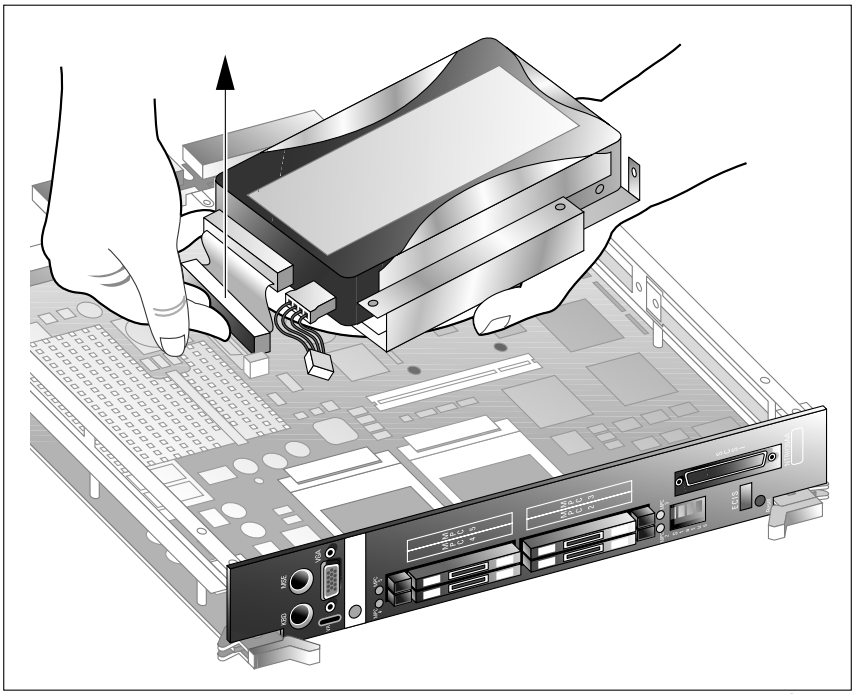


G101448

4 Lift the hard drive assembly away from the motherboard.

5 Do the following:

IF you are	THEN
replacing the hard drive with a new one	continue with step 6.
keeping the hard drive but replacing the 201i server	continue with "To install the hard drive," on page 127.

6 Detach the hard drive bracket by removing the two screws on the bottom of the hard drive assembly.

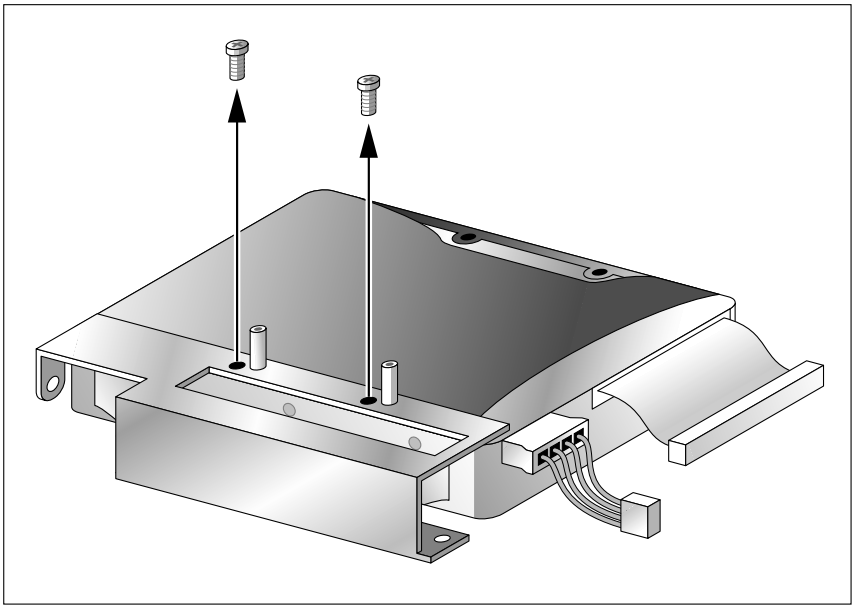

G101449

7 Remove the power and data cables from the hard drive.

8 Continue with “To install the hard drive,” on page 127".

To install the hard drive

1 If you are replacing the hard drive with a new one, do the following:

a. Attach the hard drive bracket to the new hard drive.

b. Attach the power and data cables to the new hard drive.

2 Connect the power and data cables to the 201i server motherboard.

Refer to "Hard drive assembly diagram," on page 123.



CAUTION

Risk of equipment damage

Ensure the pins on the data connector on the motherboard line up correctly with the data cable connector.

When the data cable connector is correctly aligned with the connector on the motherboard, press firmly down until the connector is properly seated.

3 Position the hard drive assembly in the server.

Align the hard drive's bracket over the PCI connector on the motherboard, and then lower the assembly into position.

Note: The PCI connector on the motherboard is reserved for future use.

4 Align the drive with the screw holes.

5 Replace and tighten the screws.

ATTENTION

The five screws you removed earlier are two different sizes. The three smaller screws belong to the back of the motherboard and the bottom edge of the motherboard's stiffener cage (see steps 1a and 1b on page 124).

The two larger screws belong to the hard drive's stiffener cage (along the backplane edge of the server) (see step1c on page 124).

What's next?

Review the procedures for installing the server and conducting diagnostic tests.

Replacing the software feature key

Introduction

The software feature key (dongle) stores the unique serial number of the server. If the 201i server must be replaced, use this procedure to move the software feature key from the faulty server to the replacement server.

Equipment required

The following equipment is required for this procedure:

- flat blade screwdriver
- tweezers

Before you begin

Before you replace the hard drive, review the following:

- "Removing the server from the switch," on page 115
- the "201i server component diagram: exploded view," on page 119

To replace the software feature key

1 Use the flat blade of the screwdriver to lift the clip that secures the software feature key to the motherboard.



CAUTION


Risk of equipment damage

Ensure that you do not bend the clip so that it can no longer apply downward pressure.

2 Use the tweezers to pull the software feature key out of the socket.

3 Insert the software feature key into the socket on the replacement server, lip side up.

When the software feature key (dongle) is correctly installed, it is firmly seated in its socket. See the following diagram:

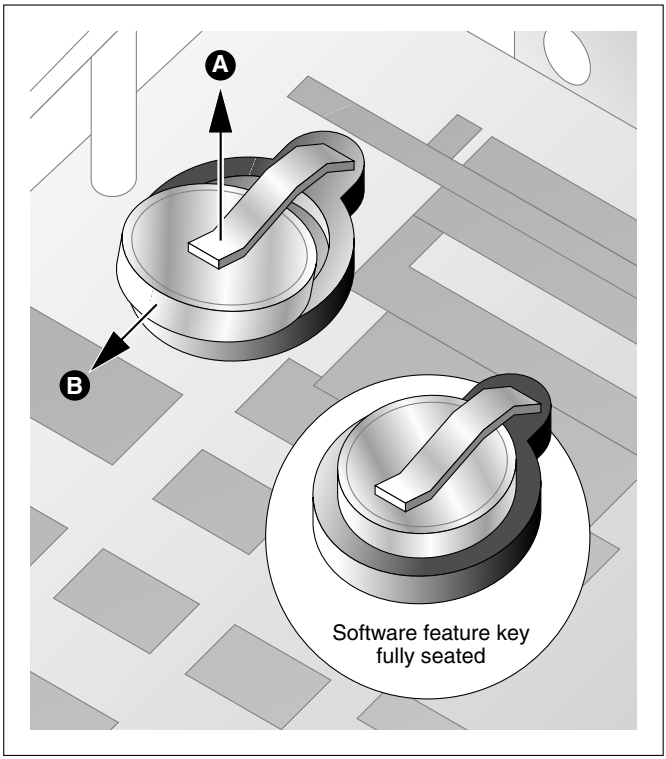

Replacing Multimedia Processing Cards

Introduction

The Nortel Networks MPC-8 card supports multimedia telephony services on the 201i server.


Note: The 201i server motherboard contains one built-in MPC. This MPC is known as MPC 1.

Supported MPC-8 card versions

The 201i server supports MPC-8 cards, Release 14 or later.

What the MPC-8 card looks like

The following is a diagram of the MPC-8 card:

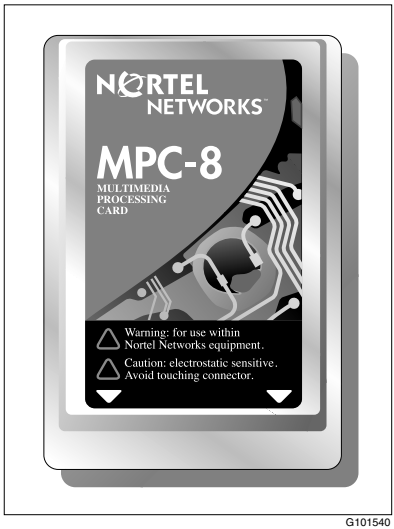

Correct card insertion

Four specially designed card slots for the MPC-8 are located on the 201i server faceplate. The MPC-8 card is keyed so that it fits only one way into the slot on the 201i server faceplate. If the card is inserted incorrectly, the card does not go all the way into the slot.


CAUTION

Risk of equipment damage

If you force the card into the slot incorrectly, this can result in damage to the MPC-8 card and the 201i server.

Location of MPC slots

There is an ejector button, slot, and LED for each MPC. The following diagram shows where they are located on the 201i server:

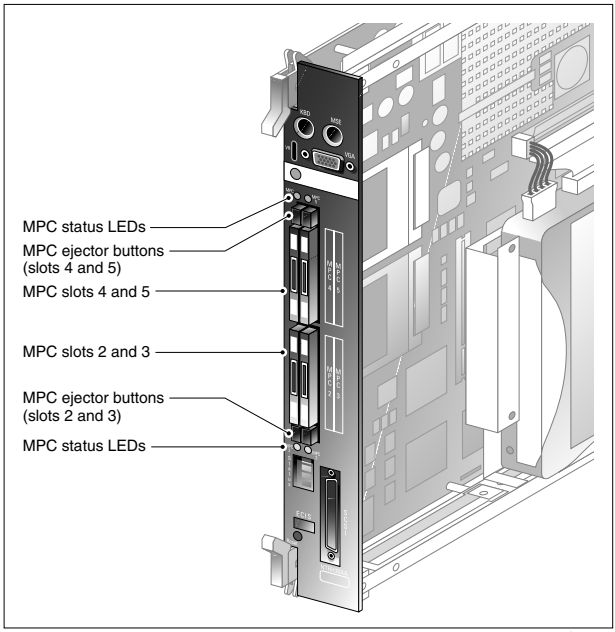

The following table describes each LED status:

Status	Description
Off	The MPC is not receiving power. It is safe to remove the card.
On	The MPC is in use. In this case, it is not safe to remove the card.
Off, then on	The MPC has been recognized by the 201i server software and has been powered up.
On, then off	The MPC has been successfully powered down. It is safe to remove the card.

To remove an MPC

ATTENTION

You can replace an MPC-8 card without powering down the 201i server. You must, however, disable the MPC-8 card using the CallPilot Manager software (as described in this procedure) before you remove it from the server.

ATTENTION

This procedure assumes that the 201i server is locked into position on the IPE shelf. If it is not, perform steps 3 and 4 only.

1 In CallPilot Manager, courtesy stop the channels associated with the MPC-8 card.

For instructions, see "Starting and stopping components," on page 81.

2 Ensure that the MPC's LED on the 201i server faceplate is not lit, which indicates that the MPC is no longer receiving power and can be removed safely.



CAUTION

Risk of equipment damage

If you remove an MPC while it is receiving power, this can damage the MPC or the 201i server.

3 Firmly press the MPC's ejector button to dislodge the MPC from its slot.

Refer to "Location of MPC slots," on page 132.



CAUTION

Risk of equipment damage


Be ready to grab the MPC card as it ejects so that it does not fall to the floor.

4 Pull the MPC out of its slot.

To install an MPC-8 card

1 Ensure that the MPC-8 card label is facing one of the following ways:

- facing to the right if the 201i server is inserted into the IPE shelf (see the following diagram)

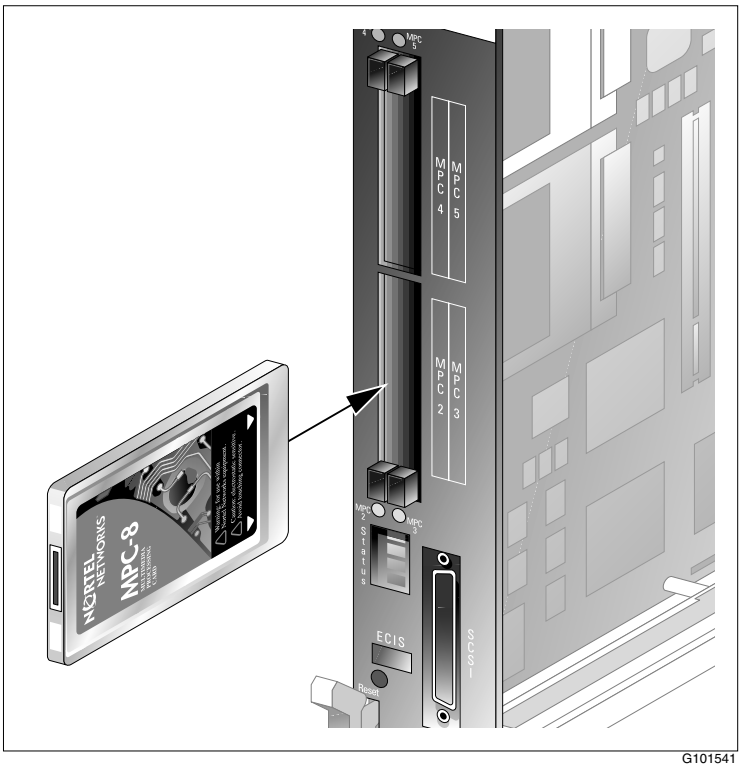

G101541

- facing up if the 201i server is lying horizontally on a flat surface

2 Insert the card into the slot, and gently push it until it is firmly in place and the ejector button pops back out.

3 Ensure that the MPC's LED lights up green.

4 Run the Configuration Wizard to detect and initialize the new hardware.

For instructions on running the Configuration Wizard, refer to the *CallPilot <switch model> and CallPilot Server Configuration* guide for your switch and server.

Note: You do not need to change any data in the Configuration Wizard. However, you must apply the configuration changes as instructed on the last screen of the Configuration Wizard.

5 Start the MPC-8 card and its channels.

Result: For instructions, see "Starting and stopping components," on page 81.

Index

Numerics

201i server
  startup failure
    8051, what to do 39
    CallPilot, what to do 40

A

Alarm Monitor, using 64–66
alarms
  about 60, 64
  investigating 65
alert icons, component states 79
application event log
  description 45
arp command 54
  parameters and descriptions 54
  running from the operating system 55
  syntax 54

C

call channels
  diagnostics, running 71
  disabling 71
  working with 96–97
CallPilot
  software, reinstalling 11
  utilities
    Diagnostics Tool 100
    PEP Maintenance 100, 104
    System Monitor 100
CallPilot Manager
  Alarm Monitor, using 64–66
  alarms
    about 60, 64
    investigating 65
  alert icons, component states 79
  Channel Monitor, using 71, 96–97
  Event Browser, using 67–69
  events
    about 60, 67
    investigating 68
  fault management
    alarm notification 60
    event processing 60
  Maintenance page
    Diagnostics section 76
    General section 75
    Maintenance section 76
    purpose 74
    using 70
  Multimedia Monitor, using 71, 94–95
CallPilot services, Channel Monitor tab 107
Channel Monitor tab 107
  CallPilot services 107
    critical 108
  DS30X links pane in 109
  DSP pane in 109
Channel Monitor, using 71, 96–97
channels
  call, working with 96–97
  diagnostics, running 71
  disabling 71
  multimedia, working with 94–95
commands, TCP/IP

arp 54
ipconfig 49
nbtstat 55
netstat 57
ping 51
tracert 52
components
CallPilot Manager maintenance activities 77
dependencies 62
diagnostics that can be run 86
diagnostics-eligible 85
list 75
replacing 15
start, about 81–83
starting 83–84
states
Alert icons 79
description 78–79
viewing 80
stop, about 81–83
stopping 83–84
Courtesy stop, description 81
CRI (fault status), what to do 38
critical services, CallPilot 108
critical startup diagnostics 32–33

D

diagnostics
critical startup 32–33
failure codes 35
integrated
running 85, 87–89
troubleshooting failures 86
when to run 85
last results
description 92
viewing 90–92
noncritical OS and switch 33–35
startup 18
TCP/IP 42, 49
arp 54
ipconfig 49
nbtstat 55
netstat 57
ping 51
tracert 52
Diagnostics section, Maintenance page 76
diagnostics tool
CallPilot 100, 101
diagrams
201i server
HEX display, location 20
LEDs, location 20
display, HEX
codes 26–29
location 20

E

Event Browser, using 67–69
event log
system 45
event logs
application 45
security 45
types, description 45
viewing 46
events
about 60, 67
investigating 68

F

FAIL (fault status), what to do 38
failure codes, diagnostics 35
fault management
alarm notification 60
event processing 60

G

General section, Maintenance page 75

H

hardware maintenance
components, replacing 15
performing 11
preparing for 11
hardware problems, detecting 62
HEX display
codes 26–29
location on 201i server 20
purpose 18

I

IDE hard drive
LED 25
integrated diagnostics
running 87–89
troubleshooting failures 86
when to run 85
ipconfig command 49
flags and descriptions 50
running from the operating system 50
syntax 49
ipconfig default 49

L

LEDs
IDE drive 25
location on 201i server 20
MPC slot 23
network 24
power status 21, 22
purpose 18
SCSI device 25
Legend/Help tab 111
logs
event, viewing 46
types, viewing 45

M

maintenance
activities by component 77
preparing for 11, 16
Maintenance page, CallPilot Manager
Diagnostics section 76
General section 75
Maintenance section 76
purpose 74
using 70
MAJ (fault status), what to do 38
MIN (fault status), what to do 38
MPC slots
LEDs 23
multimedia channels, working with 94–95
Multimedia Monitor, using 71, 94–95

N

nbtstat command 55
parameters and descriptions 55
running from the operating system 56
syntax 55
netstat command 57
parameters and descriptions 57
running from the operating system 57
syntax 57
network LED 24
noncritical OS and switch diagnostics 33–35

O

operating system
reinstalling 11
system event log, viewing 46

OS and switch diagnostics, noncritical 33–35

P

parts, obtaining replacement 15
PEP Maintenance utility 100, 104
ping command 51
  parameters and descriptions 51
  running from the operating system 52
  syntax 51
power status LED 21, 22

R

replacement parts, obtaining 15
resources, troubleshooting
  CallPilot Administrator's Guide 14
  CallPilot Troubleshooting Guide 14

S

SCSI device LED 25
security event log
  description 45
server, 201i
  startup failure
    8051, what to do 39
    CallPilot, what to do 40
software
  maintenance, preparing for 11
  reinstalling 11
startup
  diagnostics 18
    critical 32–33
    noncritical 33–35
  failure
    8051, what to do 39
    CallPilot, what to do 40
  sequence, description 36–38
Stop, description 82
system
  event log, viewing 46
  problems, resolving 10, 13
  rebuild, performing 11
system event log
  description 45
System Info tab 110
System Monitor 100
  Channel Monitor tab 107
  Legend/Help tab 111
  System Info tab 110
  using 106
system utilities
  Diagnostics Tool 101
  System Monitor 106

T

TCP/IP diagnostics 42, 49
  arp 54
  ipconfig 49
  nbtstat 55
  netstat 57
  ping 51
  tracert 52
tracert command 52
  parameters and descriptions 53
  running from the operating system 53
  syntax 52
troubleshooting
  overview 10, 13
  resources
    CallPilot Administrator's Guide 14
    CallPilot Troubleshooting Guide 14
    in this guide 13

U

utilities
  Diagnostics Tool 100, 101
  PEP Maintenance 100, 104
  System Monitor 100, 106

W

WARN (fault status), what to do 38

CallPilot

201i Server Maintenance and Diagnostics

Copyright © 2004 Nortel Networks, All Rights Reserved

Information is subject to change without notice. Nortel Networks reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant.

The process of transmitting data and call messaging between the CallPilot server and the switch or system is proprietary to Nortel Networks. Any other use of the data and the transmission process is a violation of the user license unless specifically authorized in writing by Nortel Networks prior to such use. Violations of the license by alternative usage of any portion of this process or the related hardware constitutes grounds for an immediate termination of the license and Nortel Networks reserves the right to seek all allowable remedies for such breach.

Publication number:	555-7101-119
Product release:	3.0
Document release:	Standard 1.0
Date:	November 2004

Printed in Canada

